



bs

WE INTRODUCE OURSELVES

Since the company was founded in 2005, we develop and sell floor sockets, retractable supply posts, wall distributors and energy columns for indoor and outdoor use. The priorities are in quality, design and the best price-performance ratio.

In addition to our extensive standard program, we also offer individual processing and custom-made products. Our diverse range of services ensures that your requirements are implemented quickly and efficiently.

The fact that our products are made and manufactured exclusively in Germany can be seen from the elegant design, the high-quality material and the sophisticated workmanship. Robust, tough and weatherproof for outdoors, or discreet and adapted for indoors, our products are always practical and useful.

We only use VDE-certified sockets inserts for our products, which you can also obtain from us according to French, Danish, Belgian or Swiss standards.

WITH US, YOU WILL BENEFIT

- With only one order number: One order number for a complete product.
- With ready-to-install products: You receive completely ready-to-install products, whereby the individual parts do not first have to be put together and laboriously assembled.
- With extensive stock goods: Many of our products are already prefabricated and can be delivered within a very short time.
- With a short response time: Ordered goods usually leave the factory on the same day, so that a large part of our deliveries arrive the next day.
- With creative special solutions: you can't find a suitable product that exactly matches your ideas? Let us know your requirements and we will develop affordable special solutions exactly according to your wishes.

CONTACT

BS Bodensteckdosen Systemtechnik GmbH
Dingerdisser Str. 36
(Germany) 33699 Bielefeld
Fon 0521 9892780
Fax 0521 989278-30
info@bodensteckdosen.com
bodensteckdosen.com

NOTE ON THE CONTENT OF THE CATALOG

The IP protection class applies to all products when closed and when installed correctly.
Subject to errors and technical changes.

The illustrations in the catalog were created graphically. The equipment shown in the pictures is similar to the written description.

CONTENTS

| | |
|--|-------|
| Informations | 2 |
| Floor sockets/boxes indoor..... | 5–30 |
| Floor sockets outdoor | 31–38 |
| Raised access floor sockets/boxes..... | 39–46 |
| CEE floor boxes | 47–53 |
| Retractable power distributor..... | 55–58 |
| Power columns | 59–67 |
| Wall distributors..... | 69–75 |
| Electric Mobility | 77–79 |
| Desk power strip | 81–84 |
| Hanging distributors | 85–87 |
| General terms and conditions | 88–91 |
| Model withdrawal form..... | 92 |
| Product finder/Index..... | 93 |





Floor sockets/boxes
→ Indoor




1206


| | |
|---------------------|---|
| Item No: | Equipment: |
| 1206-1 | 4 x sockets, 2 x RJ45 double (supply line from below) |
| 1206-2 | 4 x sockets, 2 x USB-charge double (supply line from below) |
| 1206-3 | 4 x sockets, 1 x RJ45 double (supply line from back) |
| 1206-4 | 4 x sockets, 1 x USB-charge double (supply line from back) |
| Material: | Aluminum |
| Dimensions: | 142 x 90 x 142 mm (W x H x D) |
| Protection: | IP20 |
| Load: | Area load max. 120 kg |
| Supply line: | Back or via opening from below → 40,7 x 40,7 mm |
| Color: | DB701, DB703, white (RAL9010), black (RAL9005) |
| Feature: | The on-floor tank is versatile, can also be mounted on work surfaces and under cupboards/shelves. |

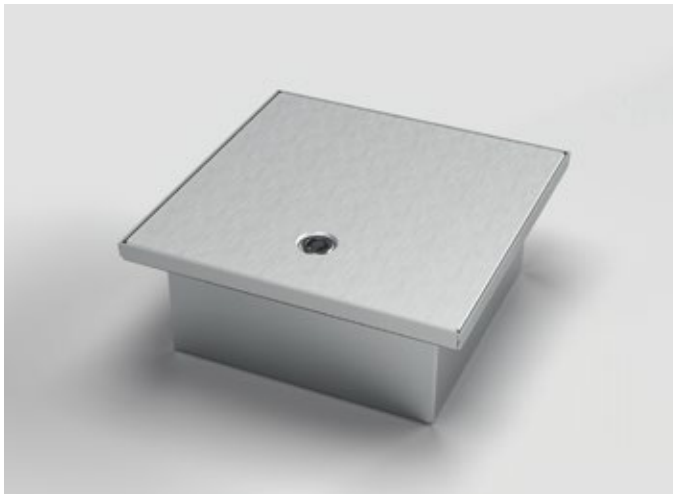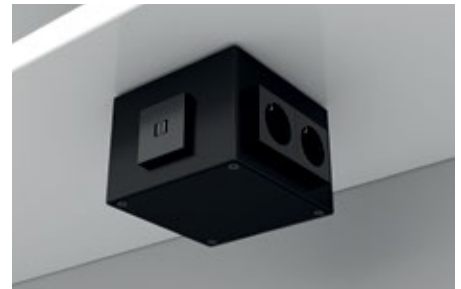

2003A

| | |
|---------------------|-------------------------------|
| Item No: | Equipment: |
| 2003A | 3 x sockets |
| 2003A1 | 2 x sockets, 1 x RJ45 double |
| Material: | Stainless steel, aluminum |
| Dimensions: | 199 x 82 x 199 mm (W x H x D) |
| Instl depth: | 82 mm (floor) |
| Protection: | IP65 |
| Load: | Area load max. 900 kg |
| Supply line: | 2x back, each Ø 25 mm |
| Feature: | Lockable with tools. |

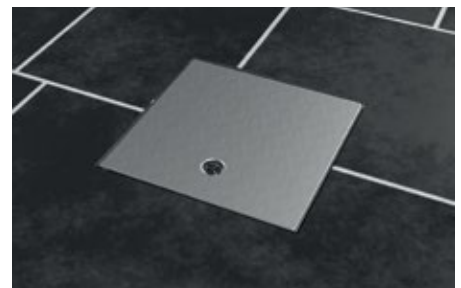


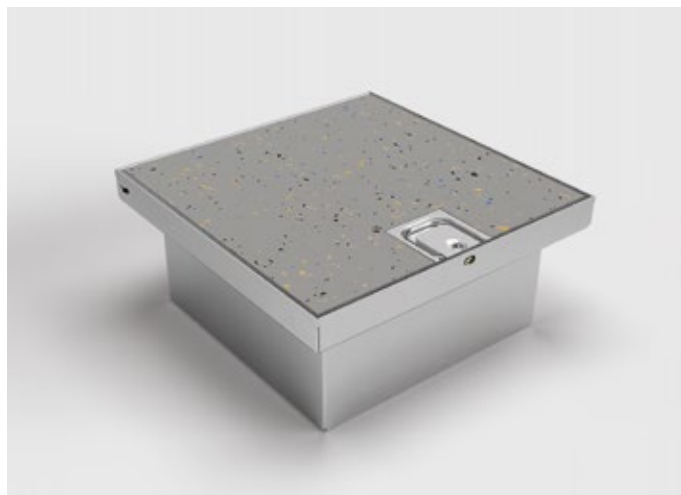

2003B

| | |
|-----------------|------------------------------|
| Item No: | Equipment: |
| 2003B | 3 x sockets |
| 2003B1 | 2 x sockets, 1 x RJ45 double |

| | |
|-------------------------|---|
| Material: | Stainless steel, aluminum |
| Dimensions: | 199 x 91 x 199 mm (W x H x D) |
| Instl depth: | 91 mm (floor) |
| Protection: | IP65 |
| Load: | Area load max. 200 kg |
| Supply line: | 2x back, each Ø 25 mm |
| Flooring insert: | 15 mm |
| Feature: | Lockable without tools, flooring can be integrated. |

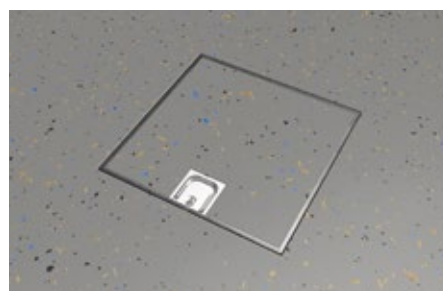

2003Q

| | |
|-----------------|------------------------------|
| Item No: | Equipment: |
| 2003Q | 3 x sockets |
| 2003Q1 | 2 x sockets, 1 x RJ45 double |

| | |
|---------------------|--|
| Material: | Stainless steel, aluminum, PVC |
| Dimensions: | 199 x 82 x 199 mm (W x H x D) |
| Instl depth: | 82 mm (floor) |
| Protection: | IP65/IP21 with attached tube |
| Load: | Area load max. 900 kg |
| Supply line: | 2x back, each Ø 25 mm |
| Feature: | Lockable with a tool, with internal tube for using the tank with the lid closed. |







2004A

| | |
|-----------------|------------------------------|
| Item No: | Equipment: |
| 2004A | 4 x sockets |
| 2004A1 | 3 x sockets, 1 x RJ45 double |


| | |
|---------------------|-------------------------------|
| Material: | Stainless steel, aluminum |
| Dimensions: | 250 x 82 x 250 mm (W x H x D) |
| Instl depth: | 82 mm (floor) |
| Protection: | IP65 |
| Load: | Area load max. 900 kg |
| Supply line: | 4 x back, each Ø 25 mm |
| Feature: | Lockable with a tool. |

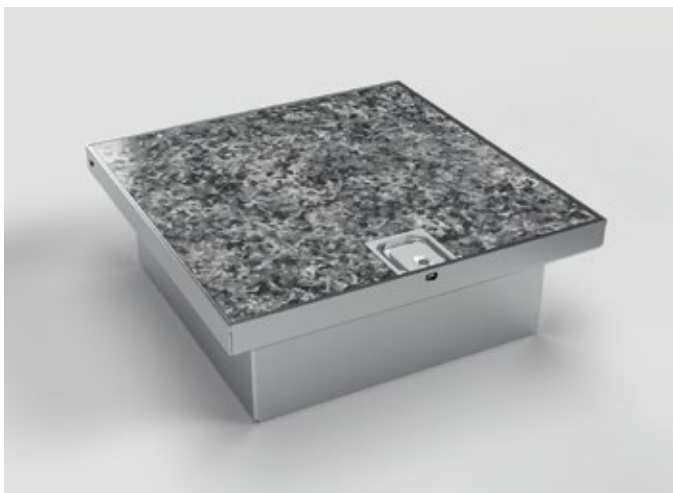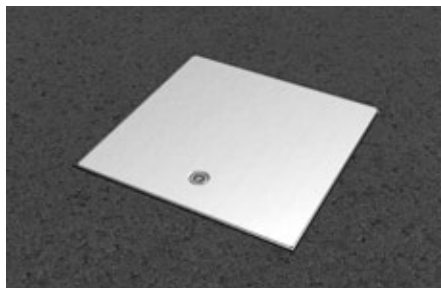

2004B

| | |
|-----------------|------------------------------|
| Item No: | Equipment: |
| 2004B | 4 x sockets |
| 2004B1 | 3 x sockets, 1 x RJ45 double |



| | |
|-------------------------|---|
| Material: | Stainless steel, aluminum |
| Dimensions: | 250 x 91 x 250 mm (W x H x D) |
| Instl depth: | 91 mm (floor) |
| Protection: | IP65 |
| Load: | Area load max. 200 kg |
| Supply line: | 4 x back, each Ø 25 mm |
| Flooring insert: | 15 mm |
| Feature: | Lockable without tools, flooring can be integrated. |

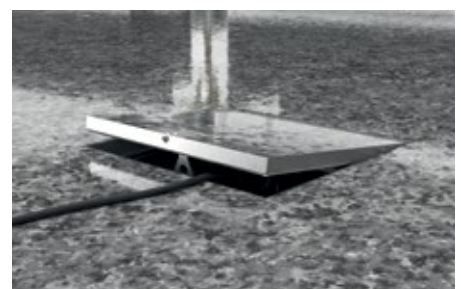



2004Q


| | |
|---------------------|--|
| Item No: | Equipment: |
| 2004Q | 4 x Sockets |
| 2004Q1 | 3 x Sockets, 1 x RJ45 double |
| Material: | Stainless steel, aluminum, PVC |
| Dimensions: | 250 x 82 x 250 mm (W x H x D) |
| Instl depth: | 82 mm (Floor) |
| Protection: | IP65/IP21 with attached tube |
| Load: | Area load max. 900 kg |
| Supply line: | 4x back, each Ø 25 mm |
| Feature: | Lockable with a tool, with internal tube for using the tank with the lid closed. |

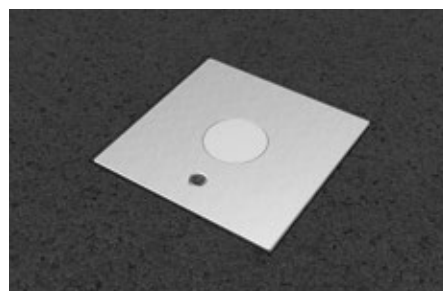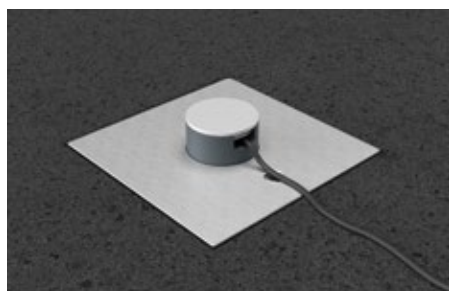

2008A

| | |
|---------------------|-------------------------------|
| Item No: | Equipment: |
| 2008A | 8 x sockets |
| 2008A1 | 4 x sockets, 4 x RJ45 double |
| Material: | Stainless steel, aluminum |
| Dimensions: | 250 x 82 x 250 mm (W x H x D) |
| Instl depth: | 82 mm (floor) |
| Protection: | IP65 |
| Load: | Area load max. 900 kg |
| Supply line: | 8x lateral, each Ø 25 mm |
| Feature: | Lockable with a tool. |




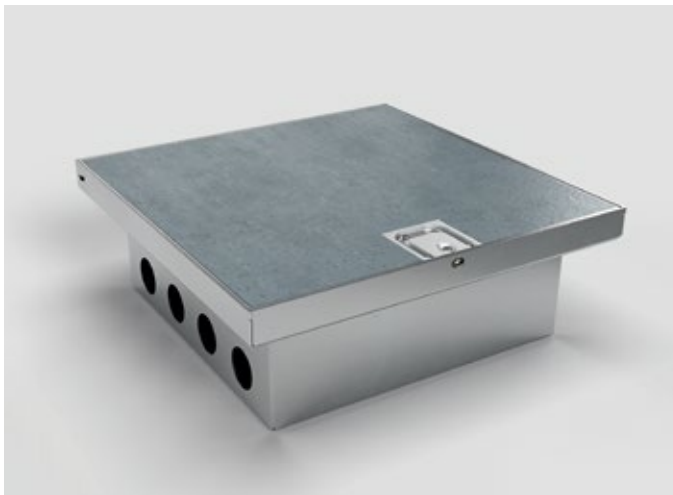

2008B

| | |
|-----------------|------------------------------|
| Item No: | Equipment: |
| 2008B | 8 x sockets |
| 2008B1 | 4 x sockets, 4 x RJ45 double |


| | |
|-------------------------|---|
| Material: | Stainless steel, aluminum |
| Dimensions: | 250 x 91 x 250 mm (W x H x D) |
| Instl depth: | 91 mm (floor) |
| Protection: | IP65 |
| Load: | Area load max. 200 kg |
| Supply line: | 8 x lateral, each Ø 25 mm |
| Flooring insert: | 15 mm |
| Feature: | Lockable without tools, flooring can be integrated. |

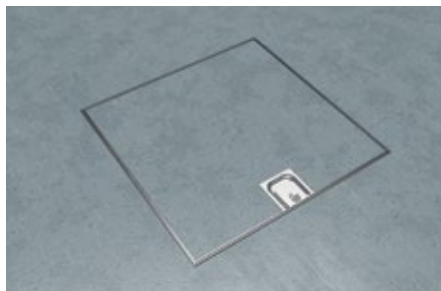

2008Q

| | |
|-----------------|------------------------------|
| Item No: | Equipment: |
| 2008Q | 8 x sockets |
| 2008Q1 | 4 x sockets, 4 x RJ45 double |

| | |
|---------------------|--|
| Material: | Stainless steel, aluminum, PVC |
| Dimensions: | 250 x 82 x 250 mm (W x H x D) |
| Instl depth: | 82 mm (floor) |
| Protection: | IP65/IP21 with attached tube |
| Load: | Area load max. 900 kg |
| Supply line: | 8 x lateral, each Ø 25 mm |
| Feature: | Lockable with a tool, with internal tube for using the tank with the lid closed. |

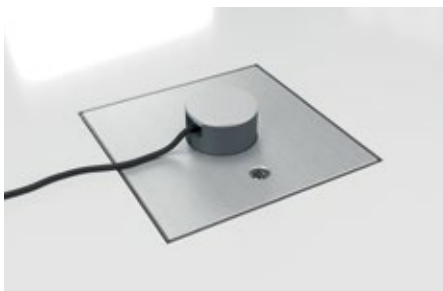




2403E

| | |
|-----------------|-------------------------------|
| Item No: | Equipment: |
| 2403E | 3 x europlug |
| 2403E1 | 2 x europlug, 1 x RJ45 single |

| | |
|---------------------|--|
| Material: | Stainless steel (1.4301) |
| Dimensions: | 200 x 45 x 200 mm (W x H x D) |
| Instl depth: | 43,5 mm (floor) |
| Protection: | IP10 |
| Load: | Area load max. 250 kg |
| Supply line: | 2 x back, 2 x below, each Ø 20 mm |
| Feature: | Very low installation depth of only 43,5 mm. |

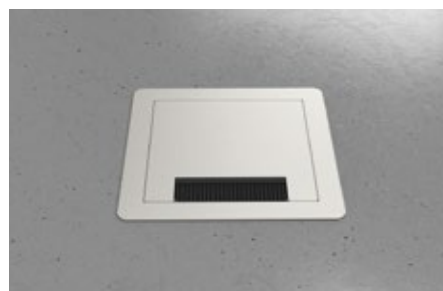

3202E

| | |
|-----------------|---|
| Item No: | Equipment: |
| 3202E | 2 x sockets (incl. box) |
| 3202E1 | 1 x socket, 1 x RJ45 double (incl. box) |
| 3202E2 | 1 x socket, 1 x aerial (incl. box) |



| | |
|---------------------|--|
| Material: | Stainless steel |
| Dimensions: | 180 x 83 x 154 mm (W x H x D) |
| Instl depth: | 81,5 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 120 kg |
| Supply line: | 2 x lateral, 2 x back, 2 x below; each Ø 26 mm |






3203E

| | |
|---------------------|--|
| Item No: | Equipment: |
| 3203E | 3 x sockets (incl. box) |
| 3203E1 | 2 x sockets, 1 x RJ45 double (incl. box) |
| 3203E2 | 2 x sockets, 1 x aerial (incl. box) |
| Material: | Stainless steel |
| Dimensions: | 230 x 83 x 153 mm (W x H x D) |
| Instl depth: | 81,5 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 120 kg |
| Supply line: | 2 x lateral, 2 x back, 2 x below; each Ø 26 mm |

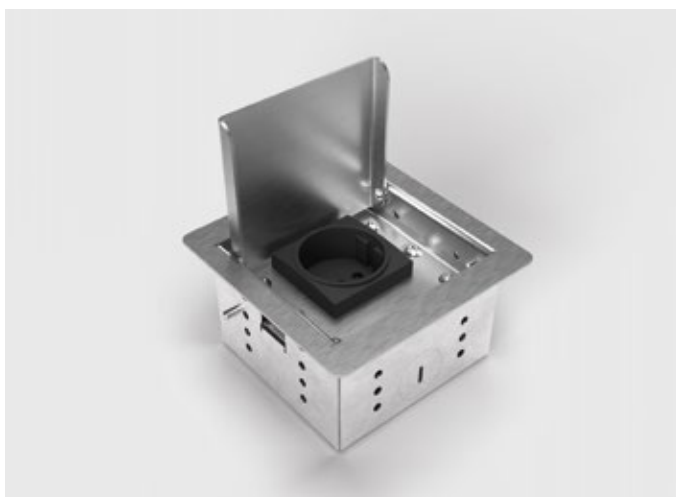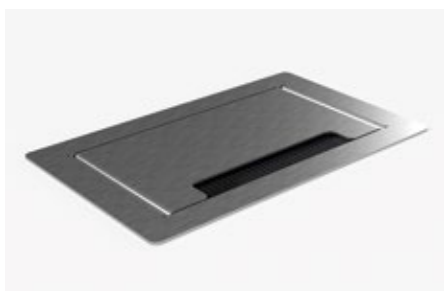

3301E

| | |
|---------------------|--|
| Item No: | Equipment: |
| 3301E | 1 x socket (incl. box) |
| 3301E1 | 1 x socket, 2 x RJ45 single (incl. box) |
| Opt. Parts: | 12184 screed placeholder made of EPS (on demand) |
| Material: | Stainless steel (1.4301) |
| Dimensions: | 110 x 62 x 110 mm (W x H x D) |
| Instl depth: | 60 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 120 kg |
| Supply line: | 1 x front, 1 x back, 2 x below; each Ø 26 mm |

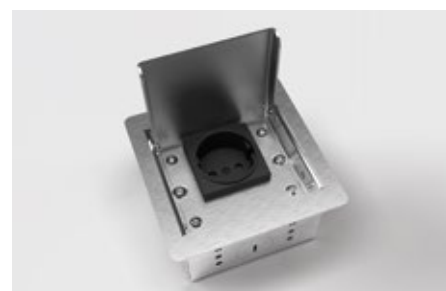



3302E

| | |
|-----------------|--|
| Item No: | Equipment: |
| 3302E | 2 x sockets (incl. box) |
| 3302E1 | 1 x socket, 1x RJ45 double (incl. box) |
| 3302E2 | 1 x socket, 1x aerial (incl. box) |

Opt. Parts: 12184 screed placeholder made of EPS (on demand)

| | |
|---------------------|--|
| Material: | Stainless steel |
| Dimensions: | 160 x 62 x 110 mm (W x H x D) |
| Instl depth: | 60 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 120kg |
| Supply line: | 2 x front, 2 x back, 2 x below, each Ø 26 mm |




3303E

| | |
|-----------------|---|
| Item No: | Equipment: |
| 3303E | 3 x sockets (incl. box) |
| 3303E1 | 2 x sockets, 1x RJ45 double (incl. box) |
| 3303E2 | 2 x sockets, 1x aerial (incl. box) |

| | |
|---------------------|--|
| Material: | Stainless steel |
| Dimensions: | 220 x 62 x 110 mm (W x H x D) |
| Instl depth: | 60 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 120kg |
| Supply line: | 2 x front, 2 x back, 2 x below, each Ø 26 mm |





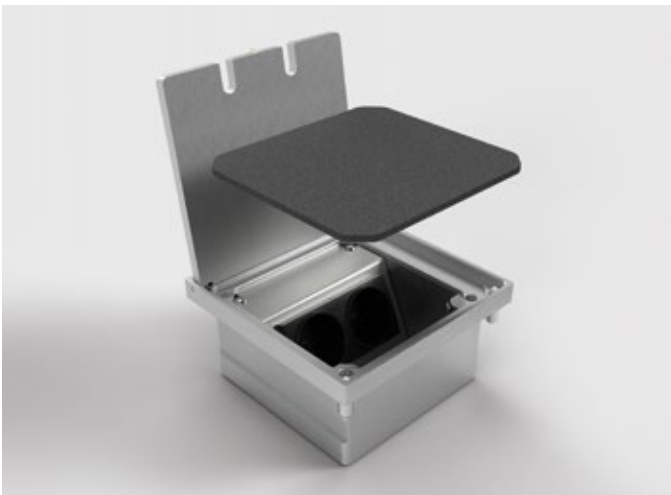


8302A

| | |
|-----------------|-----------------------------|
| Item No: | Equipment: |
| 8302A | 2x sockets |
| 8302A1 | 1 x socket, 1 x RJ45 double |
| 8302A2 | 1 x socket, 1 x aerial |

Opt. Parts: 12184 screed placeholder made of EPS (on demand)

| | |
|---------------------|--|
| Material: | Aluminum |
| Dimensions: | 1150 x 77 x 150 mm (W x H x D) |
| Instl depth: | 77 mm (floor) |
| Protection: | IP64 |
| Load: | Area load max. 900 kg |
| Supply line: | 2 x back, each Ø 25 mm |
| Feature: | Lockable without tools, can be closed with inserted plugs. |

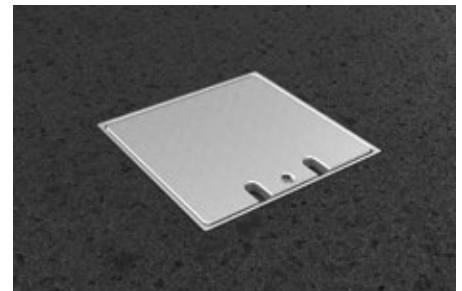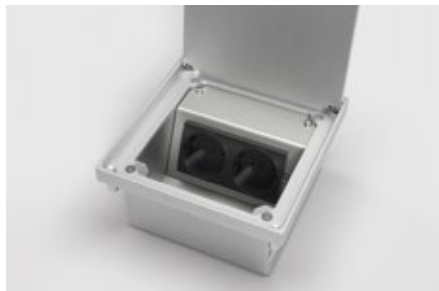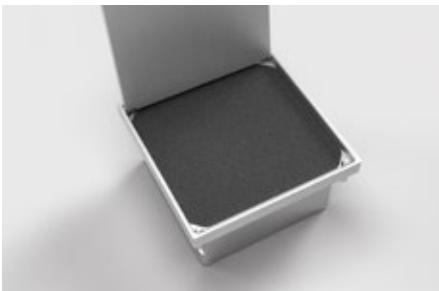

8308A

| | |
|-----------------|----------------------------|
| Item No: | Equipment: |
| 8308A | 8x sockets |
| 8308A1 | 4x sockets, 4x RJ45 double |

Opt. Parts: 12185 screed placeholder made of EPS (on demand)

| | |
|---------------------|--------------------------------|
| Material: | Aluminum, stainless steel |
| Dimensions: | 250 x 131 x 160 mm (W x H x D) |
| Instl depth: | 131 mm (floor) |
| Protection: | IP65 |
| Load: | Area load max. 500 kg |
| Supply line: | 4 x back, each Ø 25 mm |
| Feature: | Lockable without tools. |





8601A

| | |
|-----------------|-----------------------------|
| Item No: | Equipment: |
| 8601A | 1 x sockets |
| 8601A1 | 1 x socket, 1 x RJ45 1-fach |

Opt. Parts: 12102 screed placeholder made of EPS (on demand)

| | |
|---------------------|-----------------------------|
| Material: | Aluminum |
| Dimensions: | Rim Ø 140 mm, Ø 120 x 64 mm |
| Instl depth: | 62 mm (floor) |
| Protection: | IP65 |
| Load: | Area load max. 900 kg |
| Supply line: | 2 x below, each Ø 25 mm |
| Feature: | Lockable without tools. |



8602A

| | |
|-----------------|-----------------------------|
| Item No: | Equipment: |
| 8602A | 2 x sockets |
| 8602A1 | 1 x socket, 1 x RJ45 double |

Opt. Parts: 12104 screed placeholder made of EPS (on demand)

| | |
|---------------------|-----------------------------------|
| Material: | Aluminum |
| Dimensions: | Rim Ø 149 mm, Ø 130 x 70 mm |
| Instl depth: | 68 mm (floor) |
| Protection: | IP65 |
| Load: | Area load max. 900 kg |
| Supply line: | 2 x back, 2 x below, each Ø 25 mm |
| Feature: | Lockable without tools. |





8604A

| | |
|-----------------|------------------------------|
| Item No: | Equipment: |
| 8604A | 4 x sockets |
| 8604A1 | 3 x sockets, 1 x RJ45 double |

Opt. Parts: 12106 screed placeholder made of EPS (on demand)

| | |
|---------------------|--------------------------------------|
| Material: | Aluminum, stainless steel |
| Dimensions: | Rim Ø 218 mm, Ø 204 x 80 mm |
| Instl depth: | 77 mm (floor) |
| Protection: | IP65 |
| Load: | Area load max. 900 kg |
| Supply line: | 4 x lateral, 4 x below, each Ø 25 mm |
| Feature: | Lockable without tools. |




8701A

| | |
|-----------------|-------------------|
| Item No: | Equipment: |
| 8701A | 1 x socket |
| 8701A1 | 1 x RJ45 double |

Opt. Parts: 12184 screed placeholder made of EPS (on demand)

| | |
|---------------------|--|
| Material: | Aluminum |
| Dimensions: | 100 x 70 x 100 mm (W x H x D) |
| Instl depth: | 70 mm (floor) |
| Protection: | IP65 |
| Load: | Area load max. 900 kg |
| Supply line: | 1 x front, 1 x back, each M25 x 1,5 mm |
| Feature: | Lockable without tools. |

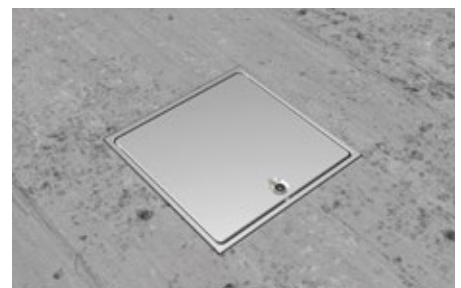




8702A

| | |
|-----------------|-----------------------------|
| Item No: | Equipment: |
| 8702A | 2 x sockets |
| 8702A1 | 1 x socket, 1 x RJ45 double |

Opt. Parts: 12184 screed placeholder made of EPS (on demand)

| | |
|---------------------|---------------------------|
| Material: | Aluminum |
| Dimensions: | 120x70x120 mm (WxHxD) |
| Instl depth: | 70 mm (floor) |
| Protection: | IP65 |
| Load: | Area load max. 900 kg |
| Supply line: | 2 x back, each M25x1,5 mm |
| Feature: | Lockable without tools. |

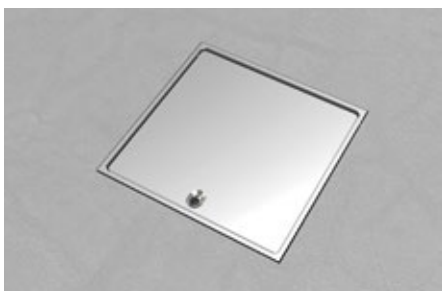


8802A

| | |
|-----------------|-----------------------------|
| Item No: | Equipment: |
| 8802A | 2 x sockets |
| 8802A1 | 1 x socket, 1 x RJ45 double |
| 8802A2 | 1 x socket, 1 x aerial |

Opt. Parts: 12184 screed placeholder made of EPS (on demand)

| | |
|---------------------|------------------------------------|
| Material: | Aluminum |
| Dimensions: | 125x72x125 mm (WxHxD) |
| Instl depth: | 72 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 900 kg |
| Supply line: | 2 x back, each Ø 25 mm |
| Leveling: | 5 mm |
| Feature: | Can be closed with inserted plugs. |

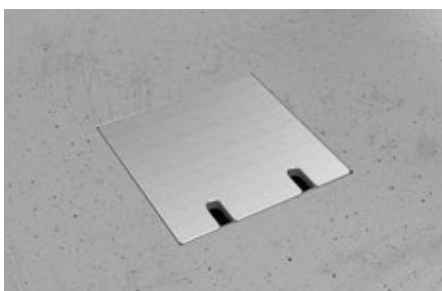



8802B

| | |
|-----------------|-----------------------------|
| Item No: | Equipment: |
| 8802B | 2 x sockets |
| 8802B1 | 1 x socket, 1 x RJ45 double |
| 8802B2 | 1 x socket, 1 x aerial |

Opt. Parts: 12184 screed placeholder made of EPS (on demand)

| | |
|---------------------|---|
| Material: | Aluminum, stainless steel |
| Dimensions: | 125 x 67 x 125 mm (W x H x D) |
| Instl depth: | 67 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 300 kg |
| Supply line: | 2 x back, each Ø 25 mm |
| Leveling: | 5 mm |
| Feature: | Rimless lid for sticking your own coverings, can be closed with inserted plugs. |






8802E

| | |
|-----------------|-----------------------------|
| Item No: | Equipment: |
| 8802E | 2 x sockets |
| 8802E1 | 1 x socket, 1 x RJ45 double |
| 8802E2 | 1 x socket, 1 x aerial |

Opt. Parts: 12184 screed placeholder made of EPS (on demand)

| | |
|---------------------|------------------------------------|
| Material: | Aluminum, stainless steel |
| Dimensions: | 125 x 69 x 125 mm (W x H x D) |
| Instl depth: | 69 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 400 kg |
| Supply line: | 2 x back, each Ø 25 mm |
| Leveling: | 5 mm |
| Feature: | Can be closed with inserted plugs. |

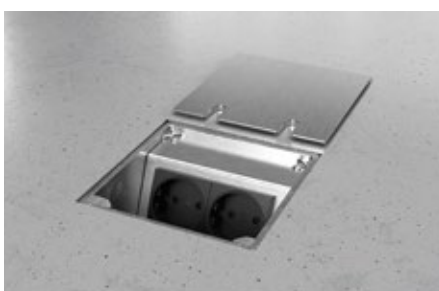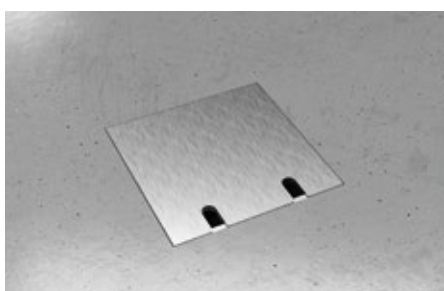


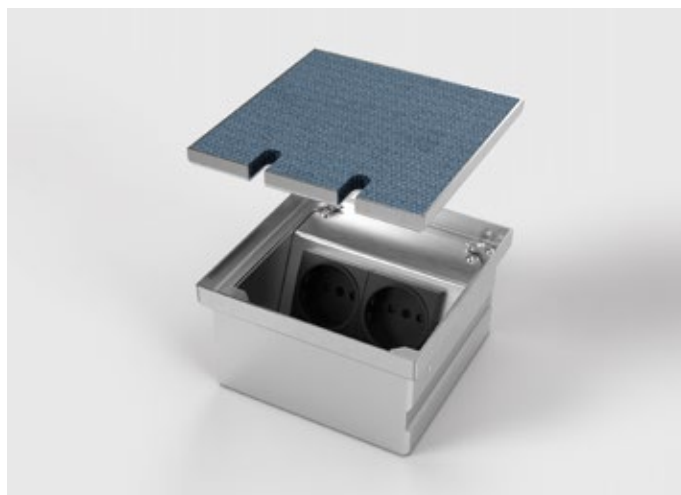


8802T

| | |
|-----------------|-----------------------------|
| Item No: | Equipment: |
| 8802T | 2 x sockets |
| 8802T1 | 1 x socket, 1 x RJ45 double |
| 8802T2 | 1 x socket, 1 x aerial |

Opt. Parts: 12184 screed placeholder made of EPS (on demand)

| | |
|-------------------------|--|
| Material: | Aluminum, stainless steel |
| Dimensions: | 135 x 75 x 135 mm (W x H x D) |
| Instl depth: | 75 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 200 kg |
| Supply line: | 2 x back, each Ø 25 mm |
| Leveling: | 5 mm |
| Flooring insert: | 6,5 mm |
| Feature: | Flooring can be integrated, closeable with inserted plugs. |

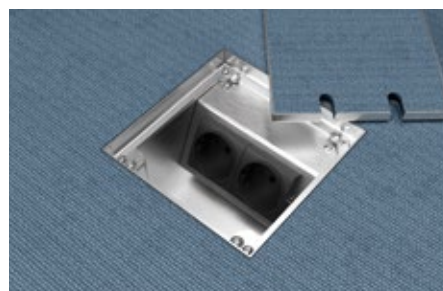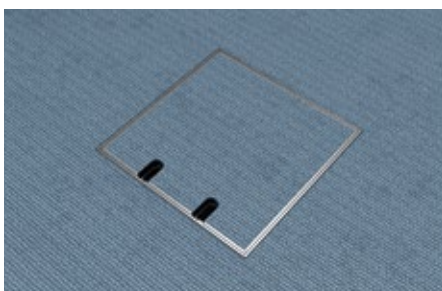

8804B

| | |
|-----------------|--|
| Item No: | Equipment: |
| 8804B | 4 x sockets |
| 8804B1 | 3 x sockets, 1 x RJ45 double |
| 8804B2 | 3 x sockets, 1 x aerial |
| 8804B3 | 2 x sockets, 1 x RJ45 double, 1 x aerial |

Opt. Parts: 12111 screed placeholder made of EPS (on demand)

| | |
|---------------------|---|
| Material: | Aluminum, stainless steel |
| Dimensions: | 220 x 68 x 150 mm (W x H x D) |
| Instl depth: | 68 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 200 kg |
| Supply line: | 4 x back, each Ø 25 mm |
| Leveling: | 5 mm |
| Feature: | Rimless lid for sticking your own coverings, can be closed with inserted plugs. |






8804E

| | |
|-----------------|--|
| Item No: | Equipment: |
| 8804E | 4 x sockets |
| 8804E1 | 3 x sockets, 1 x RJ45 double |
| 8804E2 | 3 x sockets, 1 x aerial |
| 8804E3 | 2 x sockets, 1 x RJ45 double, 1 x aerial |

Opt. Parts: 12111 screed placeholder made of EPS (on demand)

| | |
|---------------------|------------------------------------|
| Material: | Aluminum, stainless steel |
| Dimensions: | 220 x 70 x 150 mm (W x H x D) |
| Instl depth: | 70 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 300 kg |
| Supply line: | 4 x back, each Ø 25 mm |
| Leveling: | 5 mm |
| Feature: | Can be closed with inserted plugs. |



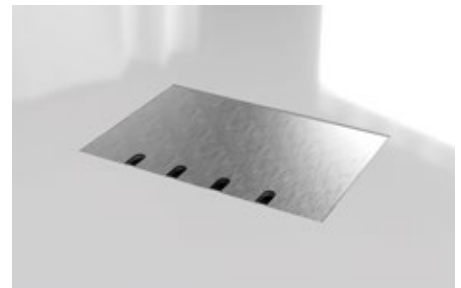


8804T

| | |
|-----------------|--|
| Item No: | Equipment: |
| 8804T | 4 x sockets |
| 8804T1 | 3 x sockets, 1 x RJ45 double |
| 8804T2 | 3 x sockets, 1 x aerial |
| 8804T3 | 2 x sockets, 1 x RJ45 double, 1 x aerial |

Opt. Parts: 12111 screed placeholder made of EPS (on demand)

| | |
|-------------------------|---|
| Material: | Aluminum, stainless steel |
| Dimensions: | 240 x 74 x 160 mm (W x H x D) |
| Instl depth: | 74 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 200 kg |
| Supply line: | 4 x back, each Ø 25 mm |
| Flooring insert: | 6,5 mm |
| Feature: | Covering can be integrated, ideal for carpets, can be closed with inserted plugs. |

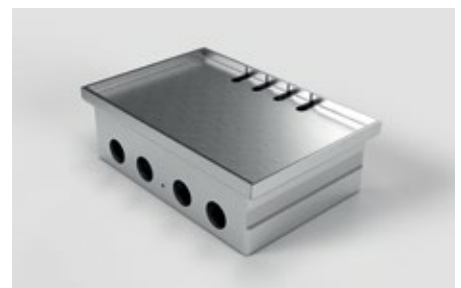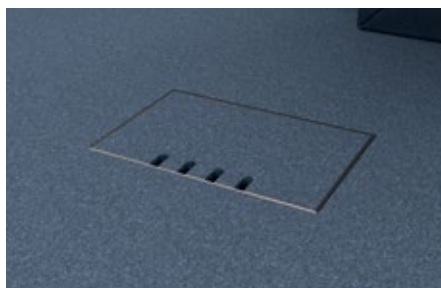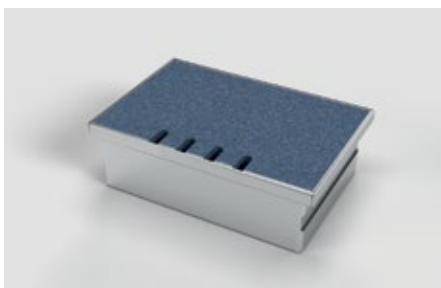







8808A

| | |
|-----------------|------------------------------|
| Item No: | Equipment: |
| 8808A | 8 x sockets |
| 8808A1 | 4 x sockets, 4 x RJ45 double |

Opt. Parts: 12185 screed placeholder made of EPS (on demand)

| | |
|---------------------|------------------------------------|
| Material: | Aluminum, stainless steel |
| Dimensions: | 240 x 61 x 240 mm (W x H x D) |
| Instl depth: | 61 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 200 kg |
| Supply line: | 4 x front, 4 x back, each Ø 25 mm |
| Leveling: | 5 mm |
| Feature: | Can be closed with inserted plugs. |

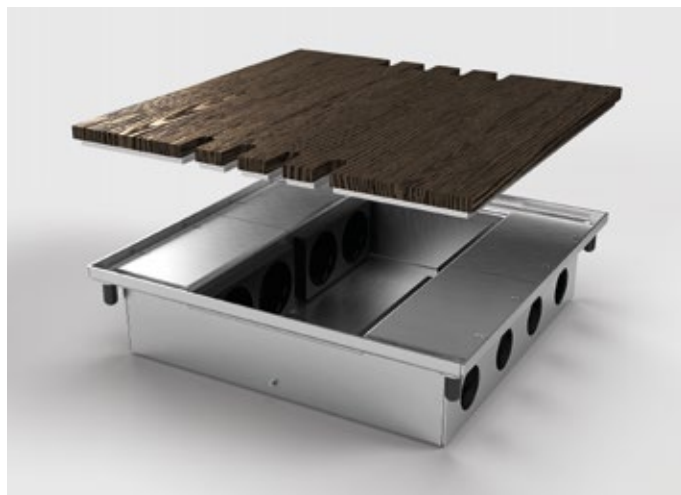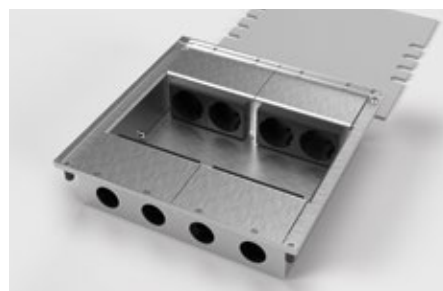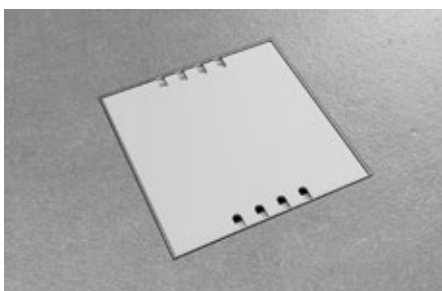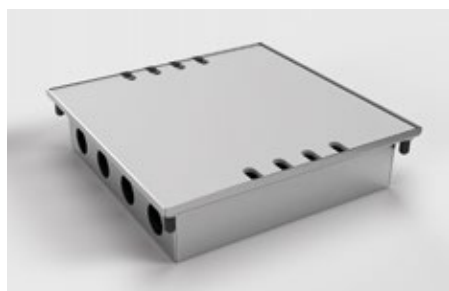



8808B

| | |
|-----------------|------------------------------|
| Item No: | Equipment: |
| 8808B | 8 x sockets |
| 8808B1 | 4 x sockets, 4 x RJ45 double |

Opt. Parts: 12185 screed placeholder made of EPS (on demand)

| | |
|---------------------|---|
| Material: | Aluminum, stainless steel |
| Dimensions: | 240 x 61 x 240 mm (W x H x D) |
| Instl depth: | 61 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 200 kg |
| Supply line: | 4 x front, 4 x back, each Ø 25 mm |
| Leveling: | 5 mm |
| Feature: | Rimless lid for sticking your own coverings, can be closed with inserted plugs. |

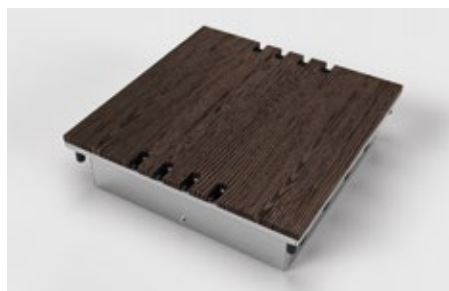




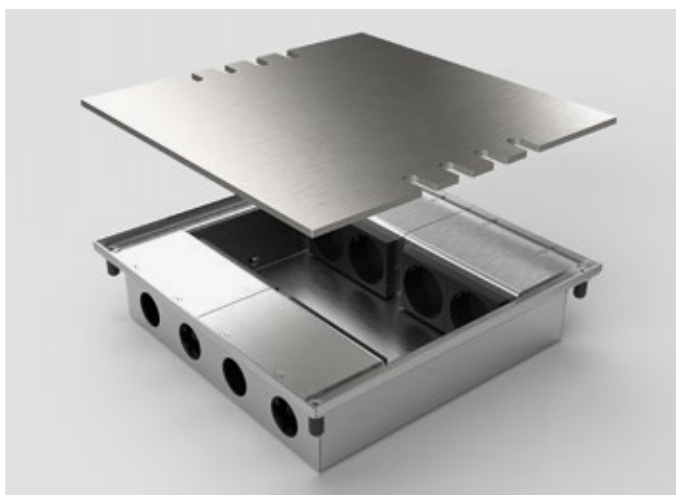


8808E

| | |
|-----------------|------------------------------|
| Item No: | Equipment: |
| 8808E | 8 x sockets |
| 8808E1 | 4 x sockets, 4 x RJ45 double |

Opt. Parts: 12185 screed placeholder made of EPS (on demand)

| | |
|---------------------|------------------------------------|
| Material: | Aluminum, stainless steel |
| Dimensions: | 240 x 61 x 240 mm (W x H x D) |
| Instl depth: | 61 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 200 kg |
| Supply line: | 4 x front, 4 x back, each Ø 25 mm |
| Leveling: | 5 mm |
| Feature: | Can be closed with inserted plugs. |

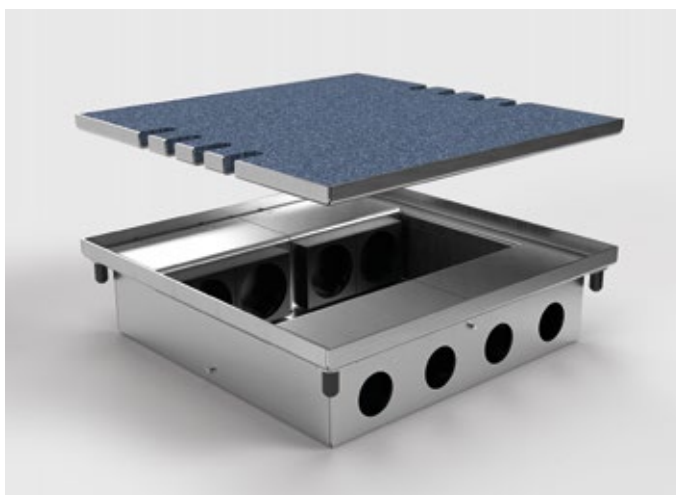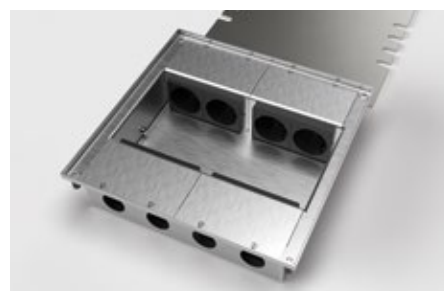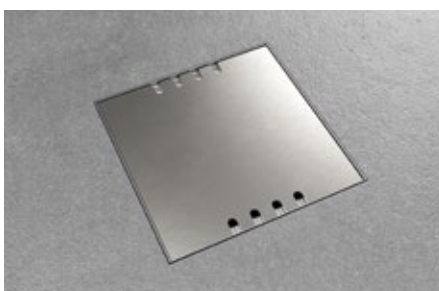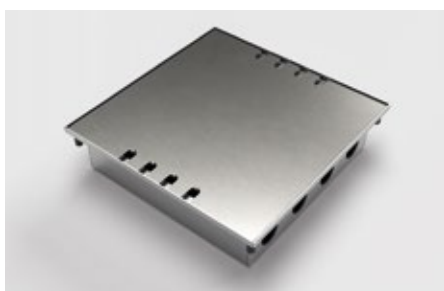


8808T

| | |
|-----------------|------------------------------|
| Item No: | Equipment: |
| 8808T | 8 x sockets |
| 8808T1 | 4 x sockets, 4 x RJ45 double |

Opt. Parts: 12185 screed placeholder made of EPS (on demand)

| | |
|-------------------------|---|
| Material: | Aluminum, stainless steel |
| Dimensions: | 240 x 65 x 240 mm (W x H x D) |
| Instl depth: | 65 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 120 kg |
| Supply line: | 4 x front, 4 x back, each Ø 25 mm |
| Flooring insert: | 6,5 mm |
| Feature: | Covering can be integrated, ideal for carpets, can be closed with inserted plugs. |



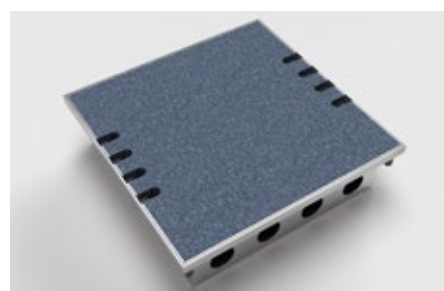




8810B

| | |
|-----------------|------------------------------|
| Item No: | Equipment: |
| 8810B | 10 x sockets |
| 8810B1 | 5 x sockets, 5 x RJ45 double |


| | |
|---------------------|---|
| Material: | Aluminum, stainless steel |
| Dimensions: | 300 x 61 x 300 mm (W x H x D) |
| Instl depth: | 61 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 200 kg |
| Supply line: | 5 x front, 5 x back, each Ø 25 mm |
| Leveling: | 5 mm |
| Feature: | Rimless lid for sticking your own coverings, can be closed with inserted plugs. |

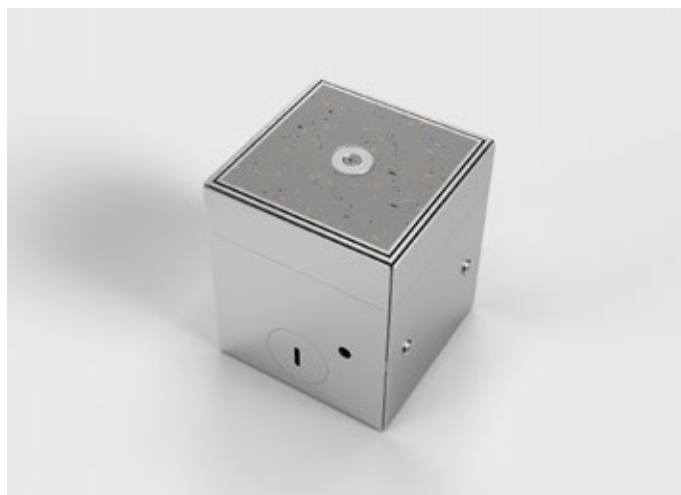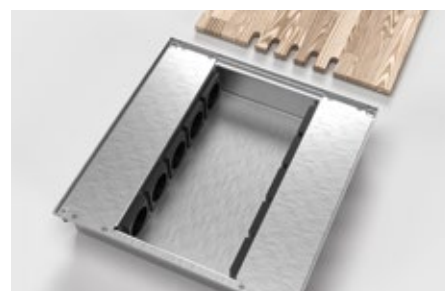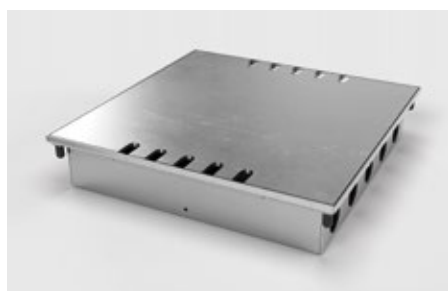

8900B

| | |
|-----------------|-------------------|
| Item No: | Equipment: |
| 8900B | 1 x socket |

| | |
|-------------------------|--|
| Material: | Stainless steel, aluminum |
| Dimensions: | 76 x 80 x 78 mm (W x H x D) |
| Instl depth: | 80 mm (floor) |
| Protection: | IP30 |
| Load: | Area load max. 120 kg |
| Supply line: | 2 x lateral, 2 x below, each Ø 25 mm |
| Leveling: | 30 mm |
| Flooring insert: | 15 mm |
| Feature: | Covering can be integrated, with magnets in the lid for easy opening of the sockets. |

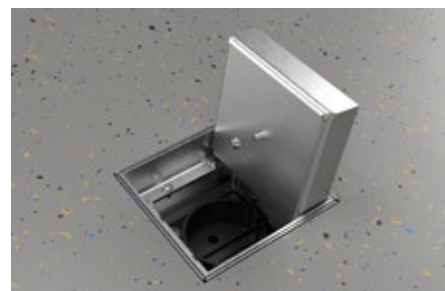




8901B

| | |
|-----------------|-------------------|
| Item No: | Equipment: |
| 8901B | 1x socket |
| 8901B1 | 1x RJ45 double |
| 8901B2 | 1x aerial |

Opt. Parts: 12201 leveling set for height correction (page 26)

| | |
|-------------------------|--|
| Material: | Stainless steel, aluminum |
| Dimensions: | 125x90x125 mm (WxHxD) |
| Instl depth: | 90–120 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 120 kg |
| Supply line: | 2 x lateral, 2 x back, 2 x below, each Ø 26 mm |
| Leveling: | 30 mm |
| Flooring insert: | 15 mm |
| Feature: | Flooring can be integrated. |

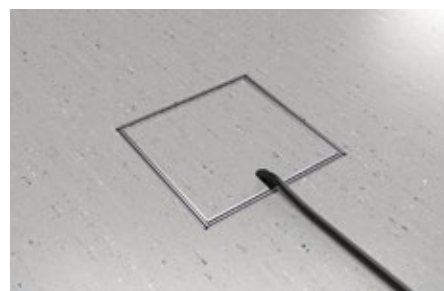

8902B

| | |
|-----------------|-----------------------------|
| Item No: | Equipment: |
| 8902B | 2 x sockets |
| 8902B1 | 1 x socket, 1 x RJ45 double |
| 8902B2 | 1 x socket, 1 x aerial |

Opt. Parts: 12201 leveling set for height correction (page 26)

| | |
|-------------------------|--|
| Material: | Stainless steel, aluminum |
| Dimensions: | 155x90x155 mm (WxHxD) |
| Instl depth: | 90–120 mm (floor) |
| Protection: | IP20 (IP10 with brush outlet) |
| Load: | Area load max. 120 kg |
| Supply line: | 2 x lateral, 2 x back, 2 x below, each Ø 26 mm |
| Leveling: | 30 mm |
| Flooring insert: | 15 mm |
| Feature: | Lid with cutouts or with brush outlet can be selected. |



8902B



8902BB



8904B

| | |
|-----------------|------------------------------|
| Item No: | Equipment: |
| 8904B | 4 x sockets |
| 8904B1 | 3 x sockets, 1 x RJ45 double |
| 8904B2 | 3 x sockets, 1 x aerial |

Opt. Parts: 12201 leveling set for height correction (page 26)

| | |
|-------------------------|--|
| Material: | Stainless steel, aluminum |
| Dimensions: | 205 x 90 x 155 mm (W x H x D) |
| Instl depth: | 90-120 mm (floor) |
| Protection: | IP20 (IP10 with brush outlet) |
| Load: | Area load max. 120 kg |
| Supply line: | 2 x lateral, 2 x back, 2 x below, each Ø 26 mm |
| Leveling: | 30 mm |
| Flooring insert: | 15 mm |
| Feature: | Lid with cutouts or with brush outlet can be selected. |



8904B



8904BB




8908B


| | |
|-----------------|------------------------------|
| Item No: | Equipment: |
| 8908B | 8 x Sockets |
| 8908B1 | 4 x Sockets, 4 x RJ45 double |

Opt. Parts: 12201 leveling set for height correction (page 26)

| | |
|-------------------------|--|
| Material: | Stainless steel, aluminum |
| Dimensions: | 205 x 90 x 205 mm (W x H x D) |
| Instl depth: | 90-120 mm (floor) |
| Protection: | IP20 (IP10 with brush outlet) |
| Load: | Area load max. 120 kg |
| Supply line: | 2 x front, 8 x lateral, 2 x back, 4 x below, each Ø 26 mm |
| Leveling: | 30 mm |
| Flooring insert: | 15 mm |
| Feature: | Lid with cutouts or with brush outlet can be selected. Lid can be closed with inserted plugs. |

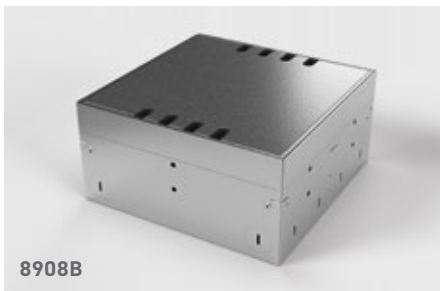

8908B

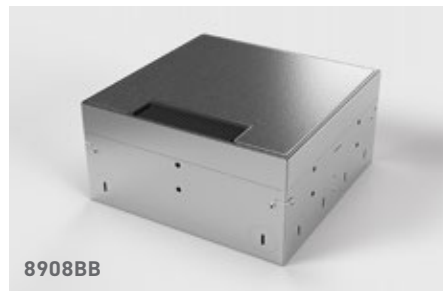

8908BB



12201

Parts for 8901 to 8908:



Item No. 12201 Leveling set for height correction of floor boxes

Professional height correction for floor boxes. The leveling set is made of stainless steel. It is developed for the 89 series and can be used for models 8901 to 8908.

Dimensions: 267 x 150 x 207 mm (W x H x D)

Leveling range: 53–153 mm in 20 mm steps

The delivery takes place without the illustrated floor box.

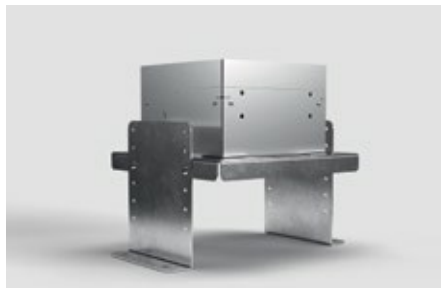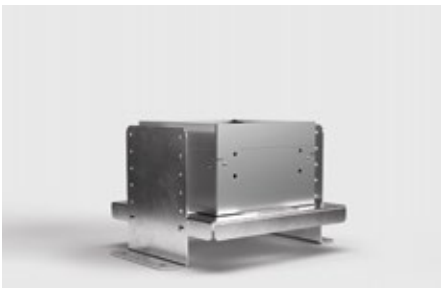


8912B

| Item No: | Equipment: |
|----------|------------------------------|
| 8912B | 12 x sockets |
| 8912B1 | 8 x sockets, 4 x RJ45 double |

Opt. Parts: 12202 leveling set for height correction (page 27)

| | |
|-------------------------|--|
| Material: | Stainless steel, aluminum |
| Dimensions: | 309 x 90 x 305 mm (W x H x D) |
| Instl depth: | 90–120 mm (floor) |
| Protection: | IP10 |
| Load: | Area load max. 120 kg |
| Supply line: | 2 x front, 8 x lateral, 2 x back, 8 x below, each Ø 26 mm |
| Leveling: | 30 mm |
| Flooring insert: | 15 mm |
| Feature: | Flooring can be integrated, can be closed with inserted plugs. |

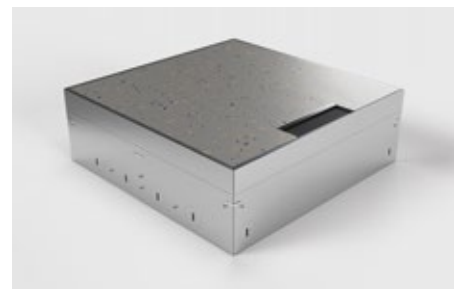



12202

Parts for floor box 8912B:

Item No. 12202 Leveling set for height correction of floor boxes

Professional height correction for floor boxes. The leveling set is made of stainless steel.

Dimensions: 308 x 150 x 305 mm (W x H x D)

Leveling range: 53–153 mm in 20 mm steps

The delivery takes place without the illustrated floor box.



8920B

Item No: 8920B 20 x sockets
8920B1 10 x sockets, 10 x RJ45 double

Opt. Parts: 12203 leveling set for height correction (page 28)

Material: Stainless steel, aluminum

Dimensions: 305 x 90 x 505 mm (W x H x D)

Instl depth: 90–120 mm (floor)

Protection: IP10


Load: Area load max. 120 kg

Supply line: 2 x front, 12 x lateral, 2 x back, 12 x below, each Ø 26 mm

Leveling: 30 mm

Flooring insert: 15 mm

Feature: Flooring can be integrated, can be closed with inserted plugs.

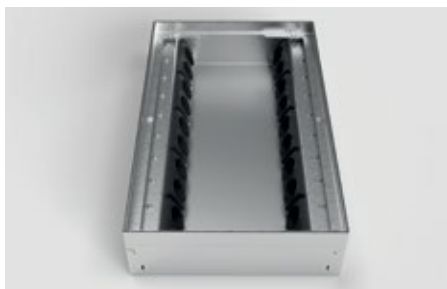



12203

Parts for the floor box 8920B:

Item No. 12203 Leveling set for height correction of floor boxes

Professional height correction for floor boxes. The leveling set is made of stainless steel.

Dimensions: 368 x 150 x 568 mm (W x H x D)

Leveling range: 53–153 mm in 20 mm steps

The delivery takes place without the illustrated floor box.



9901A

| | |
|-----------------|-------------------|
| Item No: | Equipment: |
| 9901A | 1x socket |
| 9901A1 | 1x RJ45 double |

Opt. Parts: 12102 screed placeholder made of EPS (on demand)

Material: Aluminum

Dimensions: Rim Ø 140 mm, Ø 120 x 72 mm

Instl depth: 70 mm (floor)

Protection: IP20

Load: Area load max. 200 kg

Supply line: 2x back, 2x below, each Ø 25 mm

Flooring insert: 5 mm

Feature: Flooring can be integrated in the reversible lid, lid can be closed with inserted plugs.





9902A

| | |
|-----------------|-----------------------------|
| Item No: | Equipment: |
| 9902A | 2 x sockets |
| 9902A1 | 1 x socket, 1 x RJ45 double |
| 9902A2 | 1 x socket, 1 x aerial |

Opt. Parts: 12107 screed placeholder made of EPS (on demand)

| | |
|-------------------------|---|
| Material: | Aluminum |
| Dimensions: | Rim Ø 170 mm, Ø 150 x 74 mm |
| Instl depth: | 70 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 200 kg |
| Supply line: | 2 x back, 2 x below, each Ø 25 mm |
| Flooring insert: | 5 mm |
| Feature: | Flooring can be integrated in the reversible lid. |






9902B

| | |
|-----------------|-----------------------------------|
| Item No: | Equipment: |
| 9902B | 2 x sockets |
| 9902B1 | 1 x socket, 1 x RJ45 double |
| 9902B2 | 1 x socket, 1 x aerial |
| 9902B3 | 1 x socket, 1 x USB charge double |

Opt. Parts: 12107 screed placeholder made of EPS (on demand)


| | |
|---------------------|--|
| Material: | Aluminum |
| Dimensions: | Ø 150 x 80 mm |
| Instl depth: | 80-105 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 200 kg |
| Supply line: | 2 x back, 2 x below, each Ø 25 mm |
| Feature: | Can be closed with inserted plugs. Possible height adjustment (20 mm) via integrable leveling feet. |

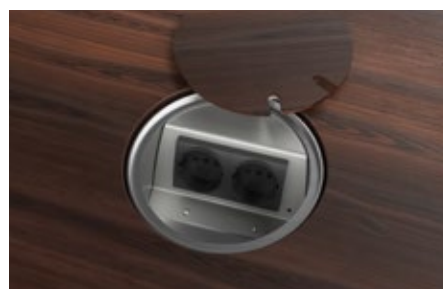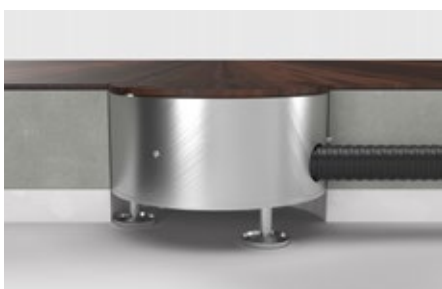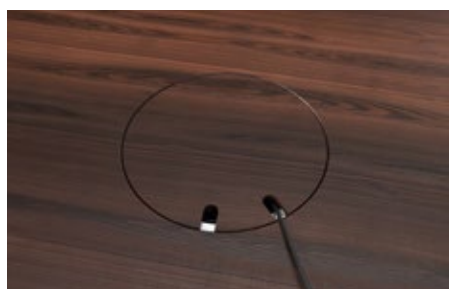



9902D

| | |
|---------------------|---|
| Item No: | Equipment: |
| 9902D | 2 x sockets |
| 9902D1 | 1 x socket, 1 x RJ45 double |
| 9902D2 | 1 x socket, 1 x aerial |
| Opt. Parts: | 12107 screed placeholder made of EPS (on demand) |
| Material: | Aluminum |
| Dimensions: | Rim Ø 170 mm, Ø 150 x 77 mm |
| Instl depth: | 75 mm (floor) |
| Protection: | IP65 |
| Load: | Area load max. 500 kg |
| Supply line: | 2 x back, 2 x below, each Ø 25 mm |
| Feature: | By turning the lid by 180° it is suitable for cleaning with wet sweepers. Can be closed with inserted plugs. |

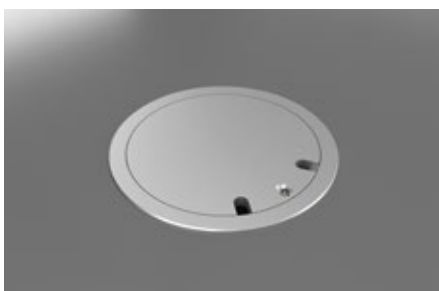

9904A

| | |
|-------------------------|--|
| Item No: | Equipment: |
| 9904A | 4 x sockets |
| 9904A1 | 2 x sockets, 2 x RJ45 double |
| 9904A2 | 2 x sockets, 1 x RJ45 double, 1 x aerial |
| Opt. Parts: | 12106 screed placeholder made of EPS (on demand) |
| Material: | Aluminum, stainless steel |
| Dimensions: | Rim Ø 220 mm, Ø 205 x 81 mm |
| Instl depth: | 77 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 200 kg |
| Supply line: | 2 x front, 2 x back, 4 x below, each Ø 26 mm |
| Flooring insert: | 6 mm |
| Feature: | Flooring can be integrated in the reversible cover, can be closed with inserted plugs. |






Floor sockets

→ Outdoor



7003A

| | |
|---------------------|---|
| Item No: | Equipment: |
| 7003A | 2 x sockets, 1 x RJ45 double |
| Material: | Aluminum, stainless steel |
| Dimensions: | Ø 150 x 108 mm |
| Instl depth: | 108 mm (floor) |
| Protection: | IP65 |
| Load: | Area load max. 900 kg |
| Supply line: | 2 x below, each M25 x 1,5 mm |
| Feature: | Lockable with a tool, waterproof when closed. |

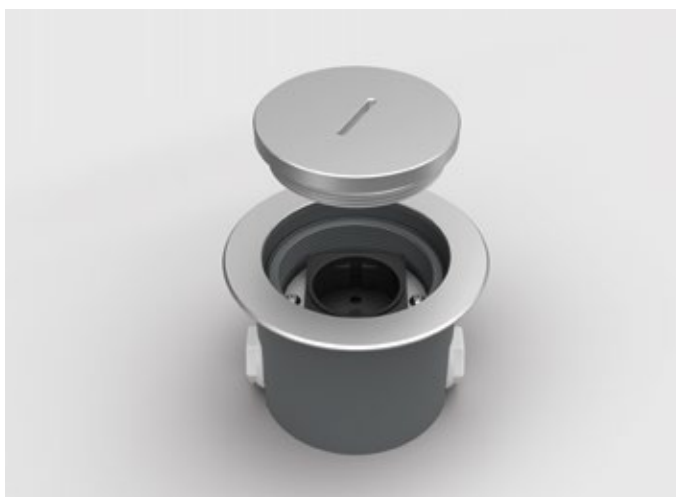


7501A



| | |
|---------------------|--|
| Item No: | Equipment: |
| 7501A | 1 x socket |
| 7501A1 | 1 x RJ45 single |
| Opt. Parts: | 12256 rain protection set (Page 37) |
| Material: | Aluminum, stainless steel, PVC |
| Dimensions: | Ø 114 x 82 mm |
| Instl depth: | 80 mm (floor) |
| Protection: | IP67 |
| Load: | Area load max. 900 kg |
| Supply line: | 2 x lateral, each M25 x 1,5 mm |
| Feature: | Lockable with a special key, waterproof when closed. |




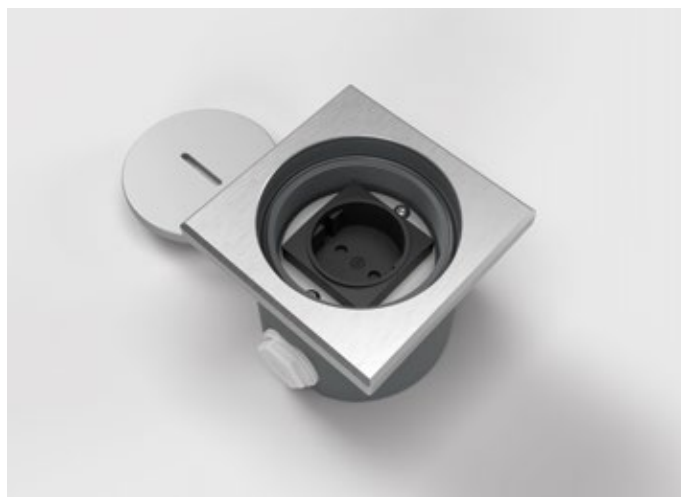

7601A



| | |
|---------------------|--|
| Item No: | Equipment: |
| 7601A | 1 x socket |
| Opt. Parts: | 12256 rain protection set (Page 37) |
| Material: | Aluminum, PVC, stainless steel |
| Dimensions: | 100 x 82 x 100 mm (W x H x D) |
| Instl depth: | 82 mm (floor) |
| Protection: | IP67 |
| Load: | Area load max. 900 kg |
| Supply line: | 2 x lateral, each M25 x 1,5 mm |
| Feature: | Lockable with a special key, waterproof when closed. |

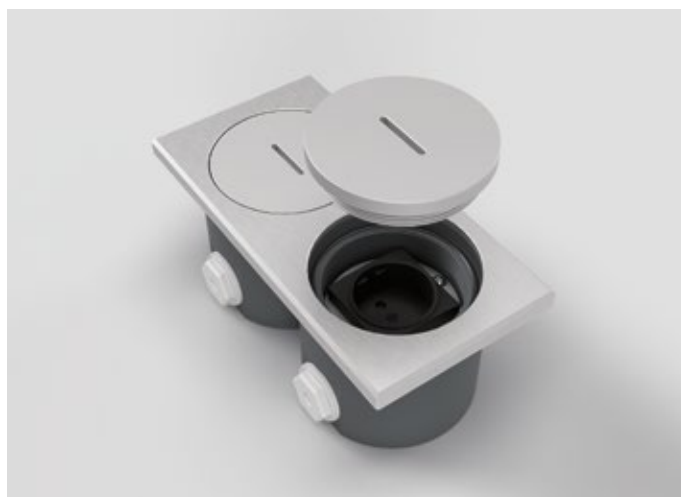

7602A



| | |
|---------------------|--|
| Item No: | Equipment: |
| 7602A | 2 x sockets |
| 7602A1 | 1 x socket, 1 x RJ45 single |
| Opt. Parts: | 12256 rain protection set (Page 37) |
| Material: | Aluminum, PVC, stainless steel |
| Dimensions: | 200 x 82 x 100 mm (W x H x D) |
| Instl depth: | 82 mm (floor) |
| Protection: | IP67 |
| Load: | Area load max. 900 kg |
| Supply line: | 2 x front, 2 x back, each M25 x 1,5 mm |
| Feature: | Lockable with a special key, waterproof when closed. |





7604A



| | |
|---------------------|--|
| Item No: | Equipment: |
| 7604A | 4 x sockets |
| 7604A1 | 2 x sockets, 2 x RJ45 single |
| Opt. Parts: | 12256 rain protection set (Page 37) |
| Material: | Aluminum, PVC, stainless steel |
| Dimensions: | 200x82x200 mm (WxHxD) |
| Instl depth: | 82 mm (floor) |
| Protection: | IP67 |
| Load: | Area load max. 900 kg |
| Supply line: | 2 x front, 2 x back, each M25x1,5 mm |
| Feature: | Lockable with a special key, waterproof when closed. |




7701AW



| | |
|---------------------|--|
| Item No: | Equipment: |
| 7701AW | 1 x socket |
| 7701AW1 | 1 x RJ45 single |
| Opt. Parts: | 12256 rain protection set (page 37) |
| Material: | Aluminum, stainless steel |
| Dimensions: | Ø 90x78,5 mm |
| Instl depth: | 78,5 mm (floor) |
| Protection: | IP67 |
| Load: | Area load max. 900 kg |
| Supply line: | 2 x lateral, each M25x1,5 mm |
| Feature: | Lockable with a special key, waterproof when closed. |



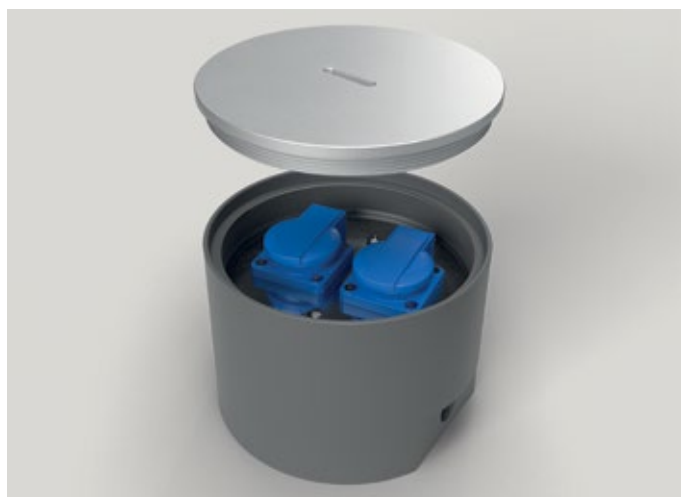

7702A



| | |
|---------------------|--|
| Item No: | Equipment: |
| 7702A | 2 x sockets |
| Opt. Parts: | 12210 ground anchor (Page 36) 12251 leveling ring (Page 36)) 12255 rain protection set (Page 37) |
| Material: | Aluminum, PVC, stainless steel |
| Dimensions: | Ø 170 x 120 mm |
| Instl depth: | 120 mm (floor) |
| Protection: | IP67 |
| Load: | Area load max. 200 kg |
| Supply line: | 2 x lateral, each M25 x 1,5 mm |
| Feature: | Lockable with a special key, waterproof when closed. |



7704A



| | |
|---------------------|--|
| Item No: | Equipment: |
| 7704A | 4 x sockets |
| Opt. Parts: | 12210 ground anchor (Page 36) 12251 leveling ring (Page 36)) 12255 rain protection set (Page 37) |
| Material: | Aluminum, PVC, stainless steel |
| Dimensions: | Ø 170 x 120 mm |
| Instl depth: | 120 mm (floor) |
| Protection: | IP67 |
| Load: | Area load max. 200 kg |
| Supply line: | 2 x lateral, each M25 x 1,5 mm |
| Feature: | Lockable with a special key, waterproof when closed. |





12210




Parts for 7702A, 7704A and 7705A:

Item No. 12210 Ground anchor

Ground anchor made from stainless steel for the installation of the floor sockets 7702A, 7704A and 7705A in the mortar bed.

Dimensions: 150 x 70 x 15 mm (W x H x D)

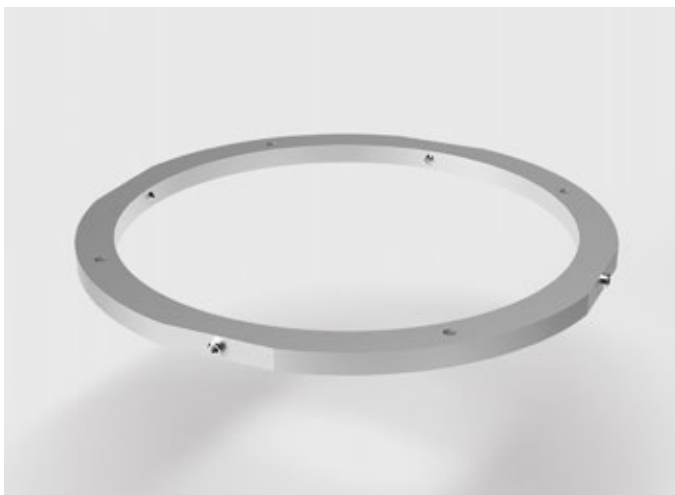

12251




Parts for 7702A, 7704A and 7705A:

Item No. 12251 Leveling ring

Solid aluminum ring for fastening the floor sockets 7702A, 7704A and 7705A in the wooden floor/raised floor.

Leveling ring dimensions: Ø 200 x 8 mm



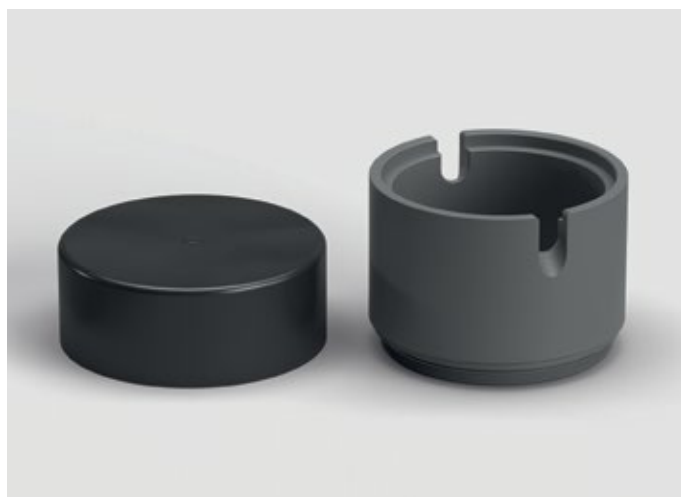

12255




Parts for 7702A and 7704A:

Item No. 12255 Extension tube and protective cap

Extension tube made of solid PVC (RAL 7011 gray) and protective cap made of soft PVC (black) to protect against rain when plugged in.

Dimensions extension tube: Ø 170 x 120 mm

Dimensions protective cap: Ø 174 x 62 mm

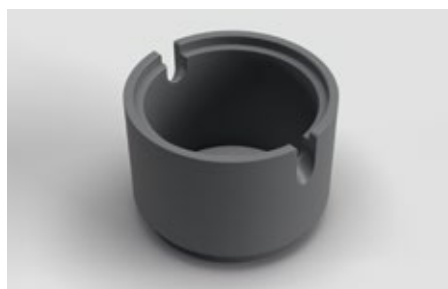

12256




Parts for 7501A, 7601A, 7602A, 7604A and 7701AW:

Item No. 12256 Extension tube and protective cap

Extension tube made of solid PVC (RAL 7011 gray) and protective cap made of soft PVC (black) to protect against rain when plugged in.


Dimensions extension tube: Ø 79 x 80 mm

Dimensions protective cap: Ø 80 x 40 mm

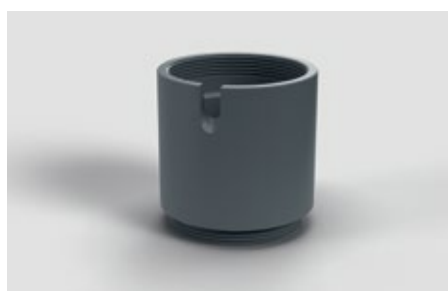




Raised access floor boxes

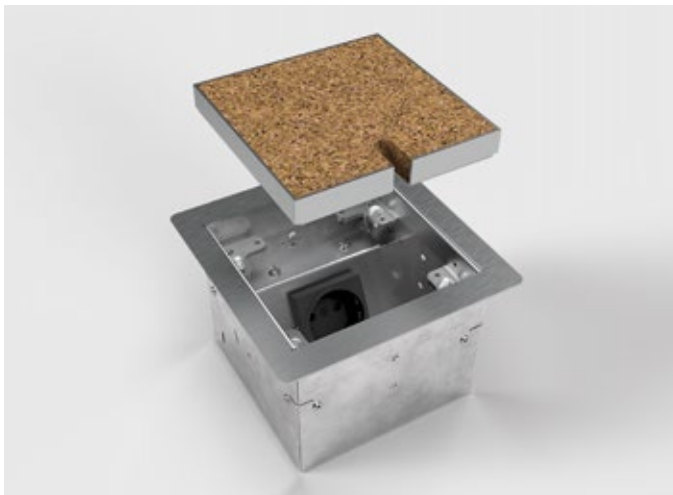



8501B


| | |
|-------------------------|--|
| Item No: | Equipment: |
| 8501B | 1 x socket |
| 8501B1 | 1 x RJ45 double |
| 8501B2 | 1 x aerial |
| <hr/> | |
| Material: | Stainless steel, aluminum |
| Dimensions: | 150 x 90 x 150 mm (W x H x D) |
| Instl depth: | 90 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 120 kg |
| Supply line: | 2 x lateral, 2 x back, 2 x below, each Ø 26 mm |
| Nivellierung: | 30 mm |
| Flooring insert: | 15 mm |
| Feature: | Covering can be integrated, can be closed with inserted plugs. |

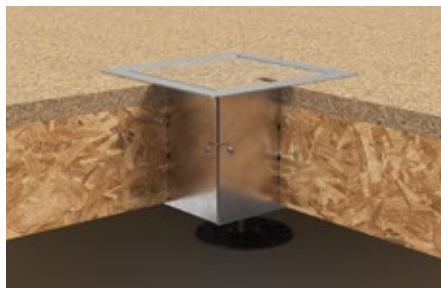

8501E





| | |
|----------------------|--|
| Item No: | Equipment: |
| 8501E | 1 x socket |
| 8501E1 | 1 x RJ45 double |
| 8501E2 | 1 x aerial |
| <hr/> | |
| Material: | Stainless steel, aluminum |
| Dimensions: | 150 x 90 x 150 mm (W x H x D) |
| Instl depth: | 90 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 120 kg |
| Supply line: | 2 x lateral, 2 x back, 2 x below, each Ø 26 mm |
| Nivellierung: | 30 mm |
| Feature: | Can be closed with inserted plugs. |

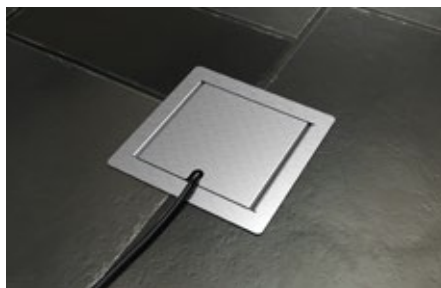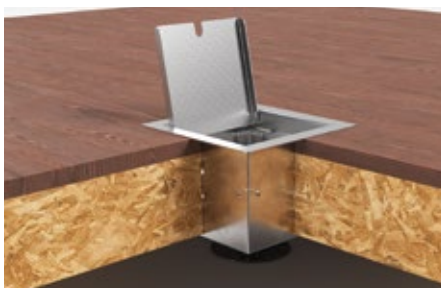

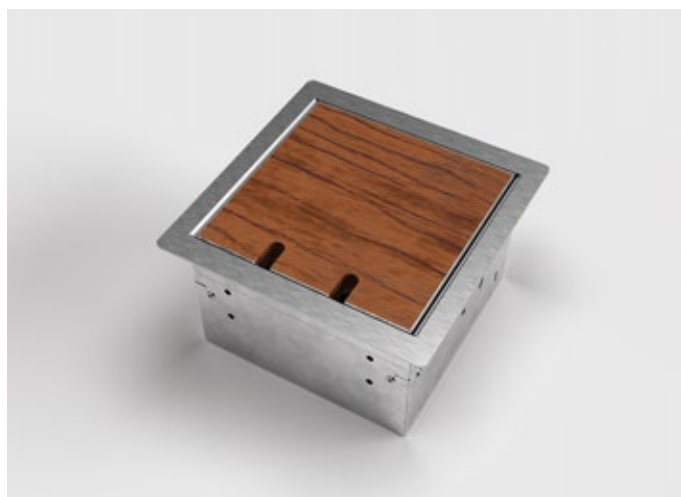


8502B

| | |
|-------------------------|--|
| Item No: | Equipment: |
| 8502B | 2 x sockets |
| 8502B1 | 1 x socket, 1 x RJ45 double |
| 8502B2 | 1 x socket, 1 x aerial |
| Material: | Stainless steel, aluminum |
| Dimensions: | 180 x 90 x 180 mm (W x H x D) |
| Instl depth: | 90 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 120 kg |
| Supply line: | 2 x lateral, 2 x back, 2 x below, each Ø 26 mm |
| Nivellierung: | 30 mm |
| Flooring insert: | 15 mm |
| Feature: | Covering can be integrated, can be closed with inserted plugs. |

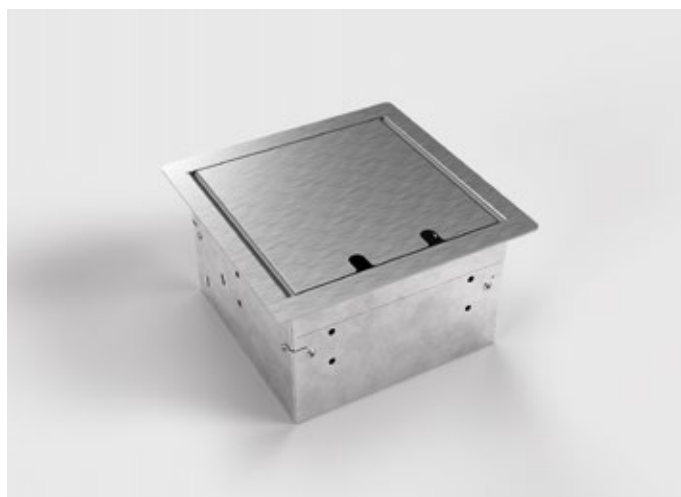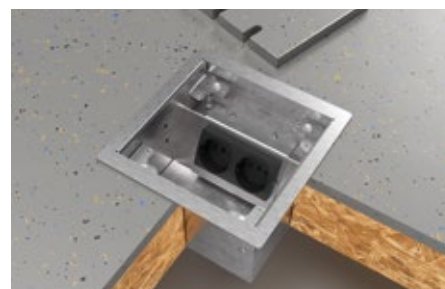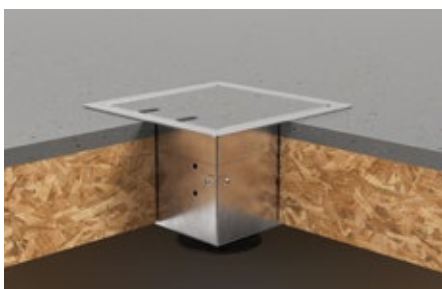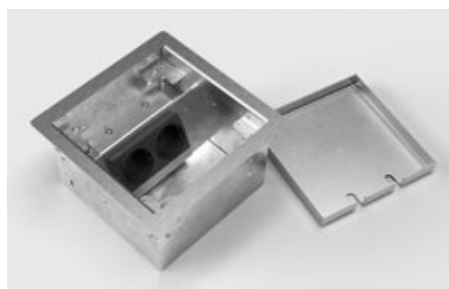


8502E

| | |
|----------------------|--|
| Item No: | Equipment: |
| 8502E | 2 x sockets |
| 8502E1 | 1 x socket, 1 x RJ45 double (brush outlet) |
| 8502E2 | 1 x socket, 1 x aerial (brush outlet) |
| Material: | Stainless steel, aluminum |
| Dimensions: | 180 x 90 x 180 mm (W x H x D) |
| Instl depth: | 90 mm (floor) |
| Protection: | IP20 (IP10 with brush outlet) |
| Load: | Area load max. 120 kg |
| Supply line: | 2 x lateral, 2 x back, 2 x below, each Ø 26 mm |
| Nivellierung: | 30 mm |
| Feature: | Can be closed with inserted plugs. |

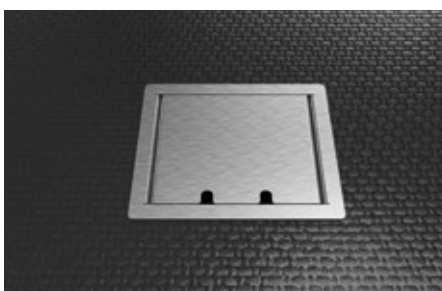



8502E1/E2

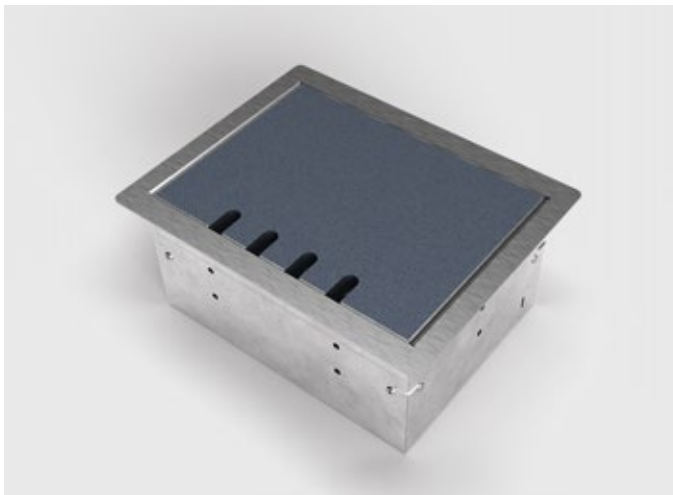

8504B

| | |
|-----------------|--|
| Item No: | Equipment: |
| 8504B | 4 x sockets |
| 8504B1 | 3 x sockets, 1 x RJ45 double |
| 8504B2 | 3 x sockets, 1 x aerial |
| 8504B3 | 2 x sockets, 1 x aerial, 1 x RJ45 double |

| | |
|-------------------------|--|
| Material: | Stainless steel, aluminum |
| Dimensions: | 230 x 90 x 180 mm (W x H x D) |
| Instl depth: | 90 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 120 kg |
| Supply line: | 2 x lateral, 2 x back, 2 x below, each Ø 26 mm |
| Nivellierung: | 30 mm |
| Flooring insert: | 15 mm |
| Feature: | Covering can be integrated, can be closed with inserted plugs. |

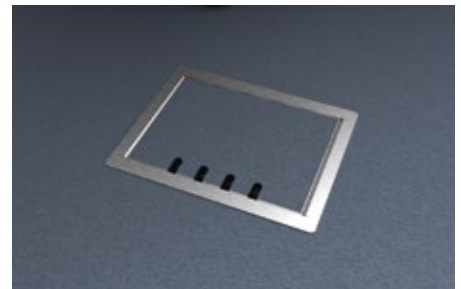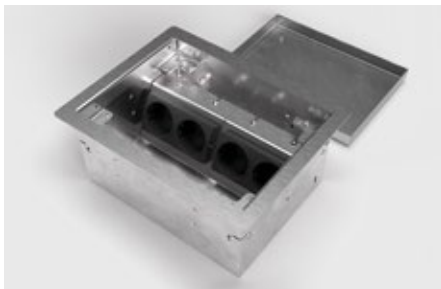

8504E

| | |
|-----------------|--|
| Item No: | Equipment: |
| 8504E | 4 x sockets |
| 8504E1 | 3 x sockets, 1 x RJ45 double |
| 8504E2 | 3 x sockets, 1 x aerial |
| 8504E3 | 2 x sockets, 1 x aerial, 1 x RJ45 double |


| | |
|----------------------|--|
| Material: | Stainless steel, aluminum |
| Dimensions: | 230 x 90 x 180 mm (W x H x D) |
| Instl depth: | 90 mm (floor) |
| Protection: | IP10 |
| Load: | Area load max. 120 kg |
| Supply line: | 2 x lateral, 2 x back, 2 x below, each Ø 26 mm |
| Nivellierung: | 30 mm |
| Feature: | Can be closed with inserted plugs. |







8508B

| | |
|-------------------------|--|
| Item No: | Equipment: |
| 8508B | 8 x sockets |
| 8508B1 | 4 x sockets, 4 x RJ45 double |
| Material: | Stainless steel, aluminum |
| Dimensions: | 230 x 90 x 230 mm (W x H x D) |
| Instl depth: | 90 mm (floor) |
| Protection: | IP20 |
| Load: | Area load max. 120 kg |
| Supply line: | 2 x front, 8 x lateral, 2 x back, 4 x below, each Ø 26 mm |
| Nivellierung: | 30 mm |
| Flooring insert: | 15 mm |
| Feature: | Covering can be integrated, can be closed with inserted plugs. |

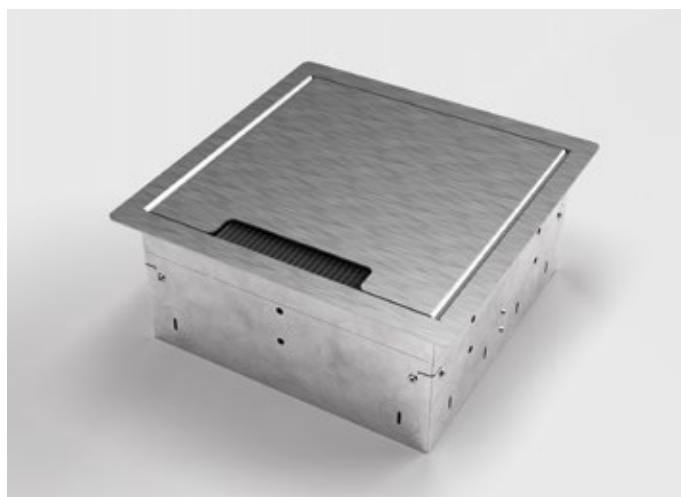

8508E

| | |
|----------------------|---|
| Item No: | Equipment: |
| 8508E | 8 x sockets |
| 8508E1 | 4 x sockets, 4 x RJ45 double |
| 8508E2 | 6 x sockets, 6 x RJ45 single |
| Material: | Stainless steel, aluminum |
| Dimensions: | 230 x 90 x 230 mm (W x H x D) |
| Instl depth: | 90 mm (floor) |
| Protection: | IP10 |
| Load: | Area load max. 120 kg |
| Supply line: | 2 x front, 8 x lateral, 2 x back, 4 x below, each Ø 26 mm |
| Nivellierung: | 30 mm |
| Feature: | Can be closed with inserted plugs. |

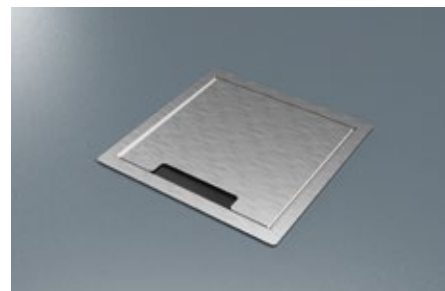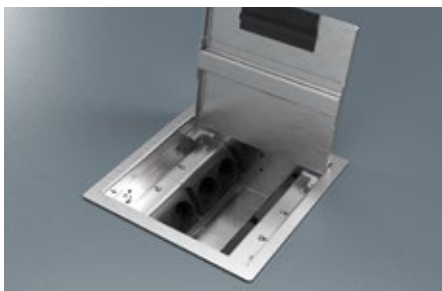




8512B

| | |
|-------------------------|--|
| Item No: | Equipment: |
| 8512B | 12 x Sockets |
| 8512B1 | 8 x Sockets, 4 x RJ45 double |
| Material: | Stainless steel, aluminum |
| Dimensions: | 350 x 90 x 350 mm (W x H x D) |
| Instl depth: | 90 mm (floor) |
| Protection: | IP10 |
| Load: | Area load max. 120 kg |
| Supply line: | 2 x front, 8 x lateral, 2 x back, 8 x below, each Ø 26 mm |
| Nivellierung: | 30 mm |
| Flooring insert: | 15 mm |
| Feature: | Covering can be integrated, can be closed with inserted plugs. |




8902H


| | |
|-------------------------|---|
| Item No: | Equipment: |
| 8902H | 2 x sockets |
| 8902H1 | 1 x sockets, 1 x RJ45 double |
| 8902H2 | 1 x sockets, 1 x aerial |
| Material: | Stainless steel, aluminum |
| Dimensions: | 200 x 90 x 200 mm (W x H x D) |
| Instl depth: | 90-120 mm (floor) |
| Protection: | IP20 (IP10 with brush outlet) |
| Load: | Area load max. 120 kg |
| Supply line: | 2 x lateral, 2 x back, 2 x below, each Ø 26 mm |
| Leveling: | 30 mm |
| Flooring insert: | 15 mm |
| Feature: | Lid with cut-outs or brush outlet selectable. Covering can be integrated, lid can be closed with inserted plugs. |

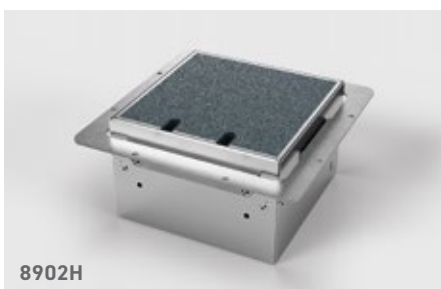

8902H

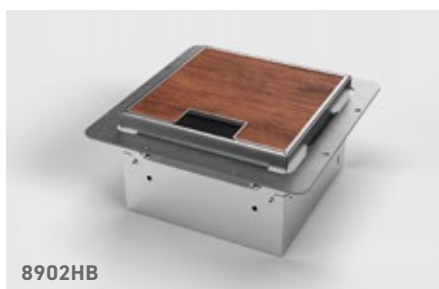


8902HB

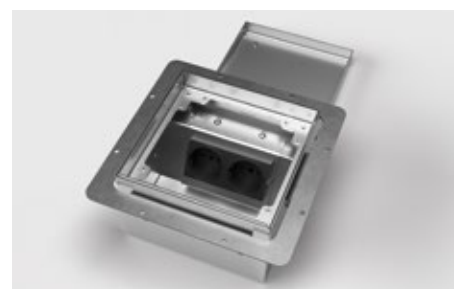




8904H

| | |
|-------------------------|---|
| Item No: | Equipment: |
| 8904H | 4 x sockets |
| 8904H1 | 3 x sockets, 1 x RJ45 double |
| 8904H2 | 3 x sockets, 1 x aerial |
| 8904H3 | 2 x sockets, 1 x RJ45 double, 1 x aerial |
| Material: | Stainless steel, aluminum |
| Dimensions: | 250 x 90 x 200 mm (W x H x D) |
| Instl depth: | 90–120 mm (floor) |
| Protection: | IP20 (IP10 with brush outlet) |
| Load: | Area load max. 120 kg |
| Supply line: | 2 x lateral, 2 x back, 2 x below, each Ø 26 mm |
| Leveling: | 30 mm |
| Flooring insert: | 15 mm |
| Feature: | Lid with cut-outs or brush outlet selectable. Covering can be integrated, lid can be closed with inserted plugs. |

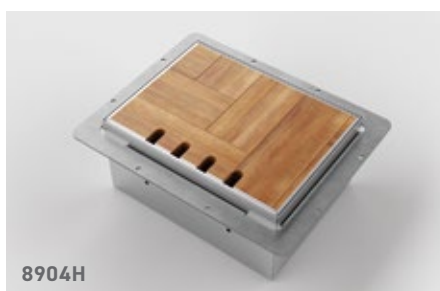

8904H

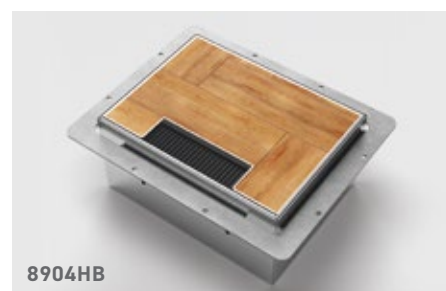

8904HB




8908H

| | |
|-------------------------|---|
| Item No: | Equipment: |
| 8908H | 8 x sockets |
| 8908H1 | 4 x sockets, 4 x RJ45 double |
| 8908HB2 | 6 x sockets, 6 x RJ45 single (only for brush outlet) |
| Material: | Stainless steel, aluminum |
| Dimensions: | 250 x 90 x 250 mm (W x H x D) |
| Instl depth: | 90–120 mm (floor) |
| Protection: | IP20 (IP10 with brush outlet) |
| Load: | Area load max. 120 kg |
| Supply line: | 2 x front, 8 x lateral, 2 x back, 4 x below, each Ø 26 mm |
| Leveling: | 30 mm |
| Flooring insert: | 15 mm |
| Feature: | Lid with cut-outs or brush outlet selectable. Covering can be integrated, lid can be closed with inserted plugs. |



8908H


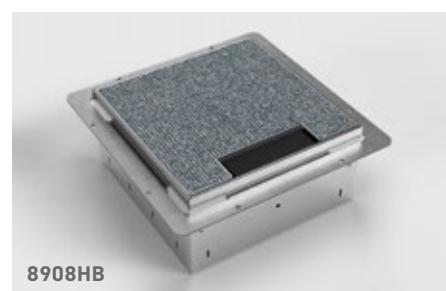


8908HB




9908A

| | |
|-------------------------|--|
| Item No: | Equipment: |
| 9908A | 8 x sockets |
| 9908A1 | 4 x sockets, 4 x RJ45 double |
| 9908A2 | 6 x sockets, 6 x RJ45 single |
| Opt. parts: | 12101 screed placeholder made of EPS (upon request) |
| Material: | Stainless steel, aluminum |
| Dimensions: | Ø 320 x 80 mm |
| Instl depth: | 76 mm (floor) |
| Protection: | IP10 |
| Load: | Area load max. 200 kg |
| Supply line: | 8 x lateral, 8 x below, each Ø 26 mm |
| Flooring insert: | 6 mm |
| Feature: | Reversible lid, covering can be integrated, can be closed with inserted plugs. |

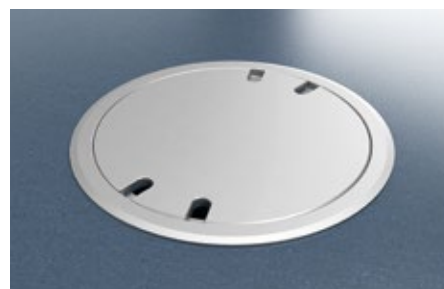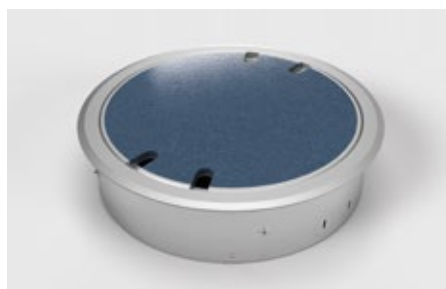




CEE floor boxes

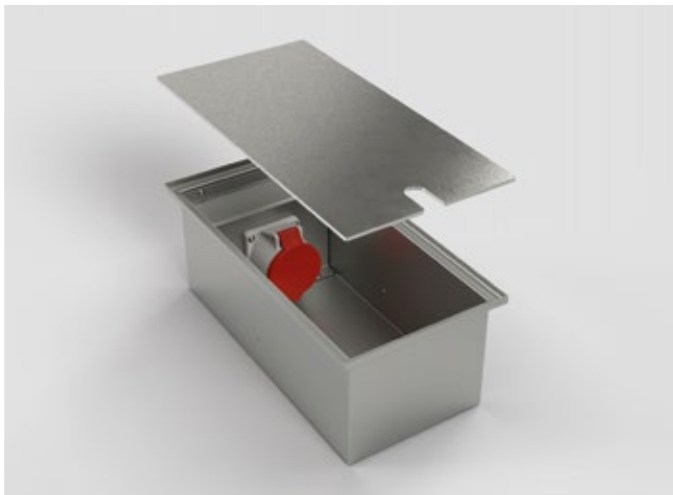

6400E

| | |
|-----------------|-----------------------|
| Item No: | Equipment: |
| 6400E1 | 1 x CEE 5/16A 400V/6h |
| 6400E2 | 1 x CEE 5/32A 400V/6h |


| | |
|---------------------|------------------------------------|
| Material: | Aluminum, stainless steel |
| Dimensions: | 200x156x400 mm (WxHxD) |
| Instl depth: | 156 mm (floor) |
| Protection: | IP10 |
| Load: | Area load max. 800 kg |
| Supply line: | 2x back, each Ø 25 mm |
| Feature: | Can be closed with inserted plugs. |

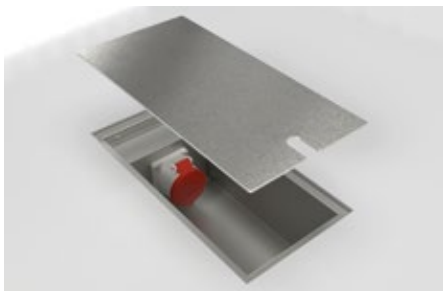


6522A

| | |
|-----------------|---|
| Item No: | Equipment: |
| 6522A | 1 x CEE 5/16A, 1 x CEE 5/32A, 2 x sockets |



| | |
|---------------------|---------------------------|
| Material: | Aluminum, stainless steel |
| Dimensions: | 400x117x400 mm (WxHxD) |
| Instl depth: | 117 mm (floor) |
| Protection: | IP65 |
| Load: | Area load max. 900 kg |
| Supply line: | 4 x back, each Ø 25 mm |
| Feature: | Lockable with a tool. |

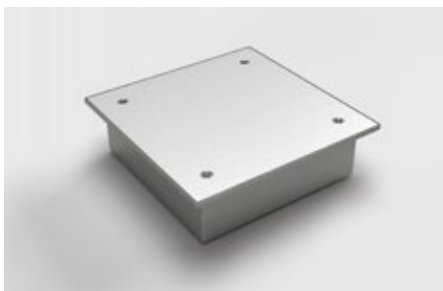

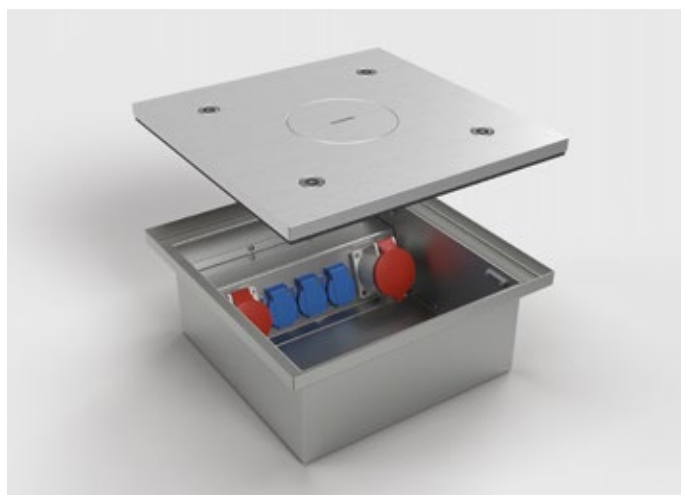

6523Q


| | |
|---------------------|---|
| Item No: | Equipment: |
| 6523Q | 1 x CEE 5/16A 400V/6h, 1 x CEE 5/32A 400V/6h, 3 x sockets |
| Material: | Aluminum, stainless steel |
| Dimensions: | 400 x 167 x 400 mm (W x H x D) |
| Instl depth: | 167 mm (floor) |
| Protection: | IP65 (with attached tube IP21) |
| Load: | Area load max. 900 kg |
| Supply line: | 4 x back, each Ø 25 |
| Feature: | Lockable with a tool, can be used through the tube with the lid closed. |

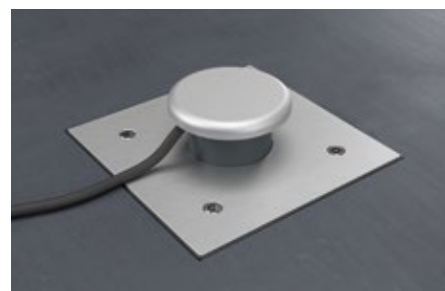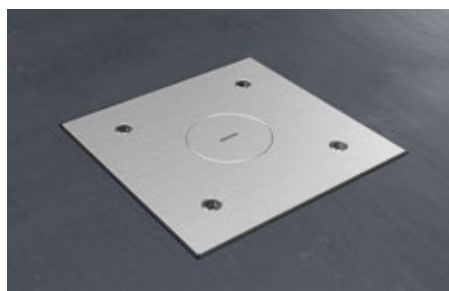

6610A



| | |
|---------------------|---|
| Item No: | Equipment: |
| 6610A1 | 1 x CEE 5/16A 400V/6h |
| 6610A2 | 1 x CEE 5/32A 400V/6h |
| Material: | Aluminum, stainless steel |
| Dimensions: | 256 x 210 x 500 mm (W x H x D) |
| Instl depth: | 210 mm (floor) |
| Protection: | IP67 (devices) |
| Load: | Area load max. 6500 kg |
| Supply line: | 2 x front, each Ø 32 mm |
| Drainage: | 1 x below, opening 50 mm |
| Feature: | Lockable with tools, can be closed with inserted plugs. When closed, the floor tank is not waterproof. A drainageline for drainage of the housing must be connected outdoors. Lid with gas pressure spring. |

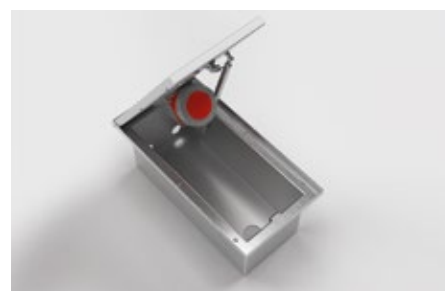



6620A



| | |
|---------------------|--|
| Item No: | Equipment: |
| 6620A | 1 x CEE 5/16A 400V/6h, 1 x CEE 5/32A 400V/6h |
| Material: | Aluminum, stainless steel |
| Dimensions: | 306 x 210 x 500 mm (W x H x D) |
| Instl depth: | 210 mm (floor) |
| Protection: | IP67 (devices) |
| Load: | Area load max. 6500 kg |
| Supply line: | 2 x front, each Ø 32 mm |
| Drainage: | 1 x below, opening 50 mm |
| Feature: | Lockable with tools, can be closed with inserted plugs. When closed, the floor tank is not waterproof. A drainpipe for drainage of the housing must be connected outdoors. Lid with gas pressure spring. |



7012A



| | |
|---------------------|--|
| Item No: | Equipment: |
| 7012A1 | 1 x CEE 5/16A 400V/6h, 2 x sockets |
| 7012A2 | 1 x CEE 5/32A 400V/6h, 2 x sockets |
| Material: | Aluminum, stainless steel |
| Dimensions: | Ø 200 x 148 mm |
| Instl depth: | 148 mm (floor) |
| Protection: | IP67 |
| Load: | Area load max. 900 kg |
| Supply line: | 3 x below, each Ø 25 mm / 2 x lateral, each M25 x 1,5 mm |
| Feature: | Lockable with a tool. |





7012A63



Item No: 7012A63
Equipment: 1 x CEE 5/63A 400V/6h

Material: Aluminum, stainless steel
Dimensions: Ø 200 x 223 mm
Instl depth: 223 mm (floor)
Protection: IP67
Load: Area load max. 900 kg
Supply line: 1 x below, Ø 43 mm
Feature: Lockable with a tool.




7022A



Item No: 7022A
Equipment: 1 x CEE 5/16A 400V/6h, 1 x CEE 5/32A 400V/6h, 2 x sockets

Material: Aluminum, stainless steel
Dimensions: Ø 250 x 148 mm
Instl depth: 148 mm (floor)
Protection: IP67
Load: Area load max. 900 kg
Supply line: 3 x below, each Ø 25 mm / 2 x lateral, each M25 x 1,5 mm
Feature: Lockable with a special key.



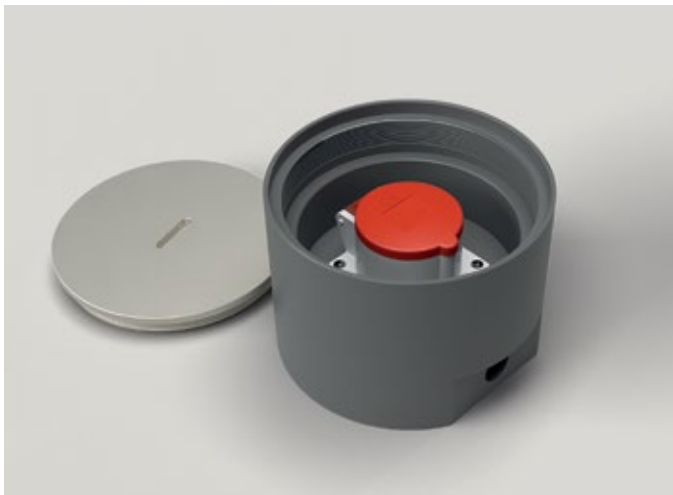

7705A



| | |
|-----------------|-----------------------|
| Item No: | Equipment: |
| 7705A1 | 1 x CEE 5/16A 400V/6h |
| 7705A2 | 1 x CEE 5/32A 400V/6h |

| | |
|--------------------|-------------------------|
| Opt. Parts: | |
| 12210 | Ground anchor (Page 36) |
| 12251 | Leveling ring (Page 36) |

| | |
|---------------------|------------------------------|
| Material: | PVC, aluminum |
| Dimensions: | Ø 170 x 120 mm |
| Instl depth: | 120 mm (floor) |
| Protection: | IP67 |
| Load: | Area load max. 200 kg |
| Supply line: | 2x lateral, each M25x1,5 |
| Feature: | Lockable with a special key. |





8310A

| | |
|-----------------|-----------------------|
| Item No: | Equipment: |
| 8310A1 | 1 x CEE 5/16A 400V/6h |
| 8310A2 | 1 x CEE 5/32A 400V/6h |

| | |
|--------------------|---|
| Opt. Parts: | |
| 12184 | Screed placeholder made from EPS (upon request) |

| | |
|---------------------|---------------------------|
| Material: | Aluminum, stainless steel |
| Dimensions: | 150x130x150 mm (WxHxD) |
| Instl depth: | 130 mm (floor) |
| Protection: | IP65 |
| Load: | Area load max. 900 kg |
| Supply line: | 2x back, each Ø 25 mm |
| Feature: | Lockable without tools. |

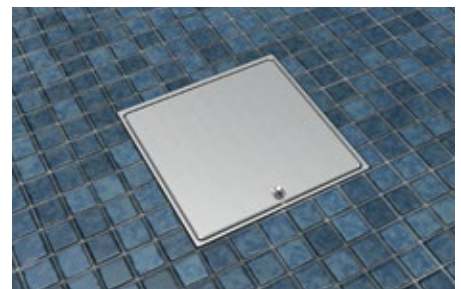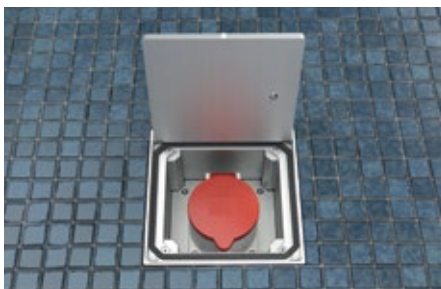




8314A

| | |
|-----------------|---|
| Item No: | Equipment: |
| 8314A1 | 1 x CEE 5/16A 400V/6h, 2 x sockets, 2 x RJ45 double |
| 8314A2 | 1 x CEE 5/32A 400V/6h, 2 x sockets, 2 x RJ45 double |

| | |
|--------------------|---|
| Opt. Parts: | |
| 12184 | Screed placeholder made from EPS (upon request) |

| | |
|---------------------|----------------------------|
| Material: | Aluminum, stainless steel |
| Dimensions: | 250x131x160 mm (W x H x D) |
| Instl depth: | 131 mm (floor) |
| Protection: | IP65 |
| Load: | Area load max. 500 kg |
| Supply line: | 4 x back, each Ø 25 mm |
| Feature: | Lockable without tools. |



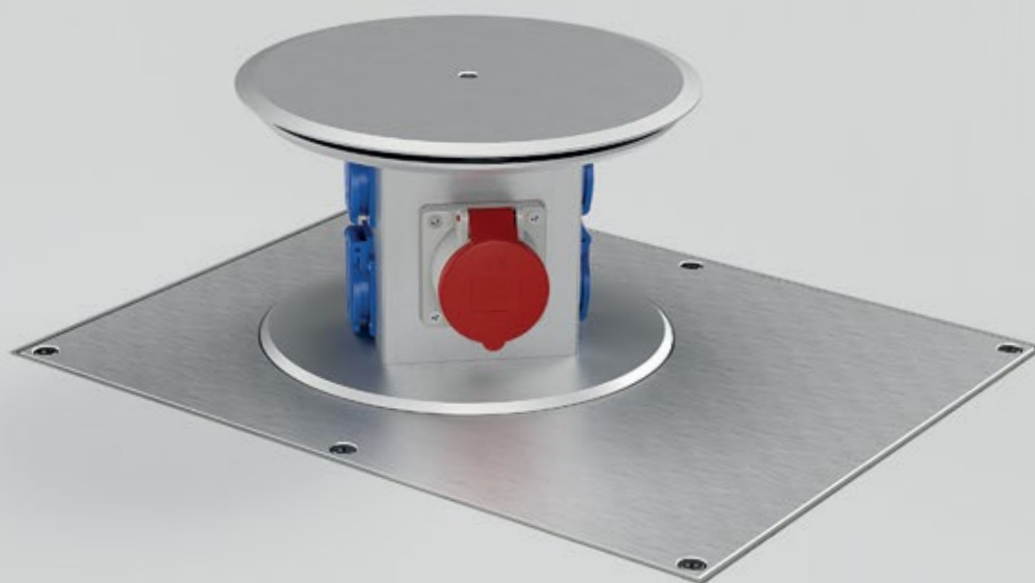


Retractable power distributors



SV111




| | |
|----------------------|--|
| Equipment: | 1 x socket |
| Material: | Aluminum, PVC |
| Dimensions: | Ø 126 x 152 mm |
| Base plate: | 145 x 145 mm (W x D) |
| Instl depth: | 149 mm (floor) |
| Protection: | IP67 |
| Load: | Area load max. 900 kg |
| Supply line: | 2 x lateral, each M25 x 1,5 mm |
| Frame design: | round |
| Feature: | Salt water resistant, waterproof when closed. The devices are raised and lowered using a special key. |

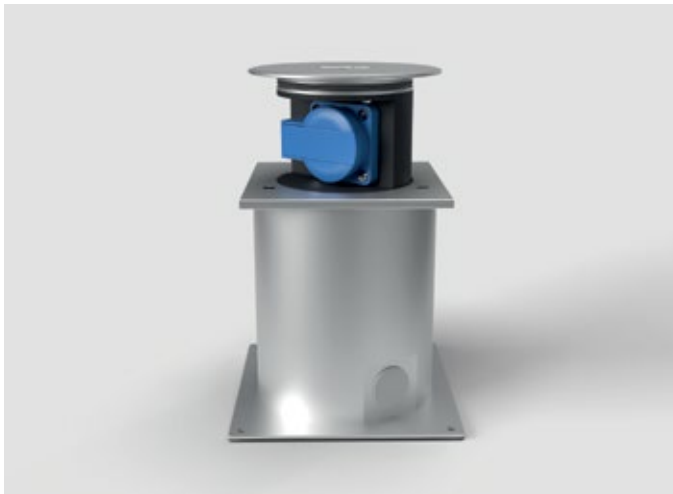

SV112



| | |
|----------------------|--|
| Equipment: | 1 x socket |
| Material: | Aluminum, PVC |
| Dimensions: | 125 x 152 x 125 mm (W x H x D) |
| Base plate: | 145 x 145 mm (W x D) |
| Instl depth: | 149 mm (floor) |
| Protection: | IP67 |
| Load: | Area load max. 900 kg |
| Supply line: | 2 x lateral, each M25 x 1,5 mm |
| Frame design: | square |
| Feature: | Salt water resistant, waterproof when closed. The devices are raised and lowered using a special key. |

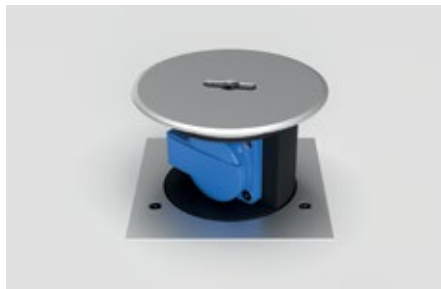



SV301



| | |
|----------------------|---|
| Item No: | Equipment: |
| SV301-2 | 4 x sockets |
| SV301-3 | 1 x CEE 5/16A 400V/6h |
| SV301-4 | 1 x CEE 5/32A 400V/6h |
| SV301-5 | 3 x sockets · 1 x CEE adapter 16A |
| Material: | Aluminum, stainless steel, PVC |
| Dimensions: | Ø 210 x 234 mm |
| Base plate: | Ø 280 mm |
| Instl depth: | 229 mm (floor) |
| Protection: | IP67 |
| Load: | Area load max. 6,5 t |
| Supply line: | 1 x lateral M25 x 1,5 mm / 2 x below, each Ø 25 mm |
| Frame design: | round |
| Feature: | Salt water resistant, waterproof when closed. With special key to open. |



SV302



| | |
|----------------------|---|
| Item No: | Equipment: |
| SV302-2 | 4 x sockets |
| SV302-3 | 1 x CEE 5/16A 400V/6h |
| SV302-4 | 1 x CEE 5/32A 400V/6h |
| SV302-5 | 3 x sockets · 1 x CEE adapter 16A |
| Material: | Aluminum, PVC |
| Dimensions: | 205 x 234 x 205 mm (W x H x D) |
| Base plate: | Ø 280 mm |
| Instl depth: | 229 mm (floor) |
| Protection: | IP67 |
| Load: | Area load max. 6,5 t |
| Supply line: | 1 x lateral M25 x 1,5 mm / 2 x below, each Ø 25 mm |
| Frame design: | square |
| Feature: | Salt water resistant, waterproof when closed. With special key to open. |





SV501



| | |
|-----------------|---|
| Item No: | Equipment: |
| SV501-1 | 8 x sockets |
| SV501-2 | 1 x CEE 5/16A 400V/6h, 6 x sockets |
| SV501-3 | 1 x CEE 5/32A 400V/6h, 6 x sockets |
| SV501-4 | 1 x CEE 5/16A 400V/6h, 1 x CEE 5/32A 400V/6h, 4 x sockets |

| | |
|---------------------|--|
| Material: | Aluminum, stainless steel |
| Dimensions: | 500 x 256 x 400 mm (W x H x D) |
| Instl depth: | 251 mm (floor) |
| Protection: | IP65 |
| Load: | Area load max. 6,5t |
| Supply line: | 2 x lateral, each Ø 25 mm / 2 x lateral, each Ø 32 mm / 1 x below drainage Ø 25 mm |
| Feature: | Salt water resistant, waterproof when closed and opened. Raise and lower with a crank. |





Power columns



ES301



| | |
|-----------------|-----------------------------------|
| Item No: | Equipment: |
| ES301-1 | 2 x sockets |
| ES301-2 | 1 x socket, 1 x switch |
| ES301-3 | 1 x socket, 1 x USB charge double |
| ES301-4 | 1 x socket, 1 x RJ45 double |

| | |
|---------------------|---------------------------------|
| Material: | Stainless steel |
| Dimensions: | 100 x 230 x 62,5 mm (W x H x D) |
| Base plate: | 130 x 82 mm (W x D) |
| Protection: | IP44 |
| Supply line: | 2 x below, each Ø 25 mm |
| Weight: | 1200 g |



ES321



| | |
|-----------------|-------------------------------------|
| Item No: | Equipment: |
| ES321-1 | 2 x sockets · 2 x CEE 3/16A 230V/6h |
| ES321-2 | 2 x sockets · 1 x CEE 5/16A 400V/6h |
| ES321-3 | 4 x sockets |

| | |
|---------------|---------------------------------|
| Parts: | BAES321 ground anchor (page 64) |
|---------------|---------------------------------|

| | |
|---------------------|-----------------|
| Material: | Stainless steel |
| Dimensions: | Ø 129 x 446 mm |
| Base plate: | Ø 180 mm |
| Protection: | IP44 |
| Supply line: | Below |
| Weight: | 3700 g |





ES323



| | |
|-----------------|---|
| Item No: | Equipment: |
| ES323-1 | 1 x CEE 5/16A 400V/6h · 4 x CEE 3/16A 230V/6h |
| ES323-2 | 2 x CEE 5/16A 400V/6h · 2 x sockets |

| | |
|---------------|---------------------------------|
| Parts: | BAES323 ground anchor (page 64) |
|---------------|---------------------------------|

| | |
|---------------------|-----------------|
| Material: | Stainless steel |
| Dimensions: | Ø 154 x 700 mm |
| Base plate: | Ø 210 mm |
| Protection: | IP44 |
| Supply line: | Below |
| Weight: | 6400 g |



ES850

| | |
|-----------------|--|
| Item No: | Equipment: |
| ES850-1 | 3 x sockets, 1 x USB charge A/C double |
| ES850-2 | 3 x sockets, 1 x RJ45 double |
| ES850-3 | 4 x sockets |

| | |
|---------------------|---|
| Material: | Aluminum (housing), stainless steel (base plate) |
| Dimensions: | 125 x 503 x 134 mm (W x H x D) |
| Protection: | IP20 |
| Supply line: | Below, Ø 52 mm |
| Color: | RAL 9006 aluminum white (other RAL colors possible) |
| Weight: | 4700 g |





ESP14



| | |
|---------------------|--|
| Item No: | Equipment: |
| ESP14-1 | 1 x CEE 5/16 A 400V/6h • 4 x sockets |
| ESP14-2 | 1 x CEE 5/32 A 400V/6h • 4 x sockets |
| Item No: | Fuse: |
| ESP14-1 | 2 x LS, B16, 1-pol • 1 x LS, C16, 3-pol • 1 x FI, 40A, 0,03A, 4-pol |
| ESP14-2 | 2 x LS, B16, 1-pol • 1 x LS, C32, 3-pol • 1 x FI, 40A, 0,03A, 4-pol |
| Parts: | BAESP14 ground anchor (page 65) |
| Material: | Stainless steel |
| Dimensions: | Ø 304 x 1136 mm |
| Base plate: | Ø 350 mm |
| Protection: | Housing IP10 / electr. units IP44 |
| Supply line: | from below |
| Color: | DB701 or DB703 (RAL colors possible) |
| Weight: | 36 kg |
| Feature: | Lockable by semi-cylinder. Door can be closed with inserted plugs. The sockets are integrated in the plastic housing, secured with FI/LS and completely wired. |

ESP24



| | |
|---------------------|--|
| Item No: | Equipment: |
| ESP24-1 | 1 x CEE 5/32 A • 1 x CEE 5/16 A • 4 x sockets |
| ESP24-2 | 1 x CEE 5/32 A • 1 x CEE 5/16 A • 8 x sockets |
| ESP24-3 | 1 x CEE 5/32 A • 1 x CEE 5/16 A • 4 x sockets • 1 x water connection |
| ESP24-4 | 1 x 63 A • 1 x CEE 5/32 A • 1 x CEE 5/16 A • 4 x sockets |
| Fuse: | adapted to the respective equipment |
| Parts: | BAESP24 ground anchor (page 66) |
| Material: | Stainless steel |
| Dimensions: | Ø 356 x 1143 mm |
| Base plate: | Ø 450 mm |
| Protection: | Housing IP10 / electr. units IP44 |
| Supply line: | from below |
| Color: | DB701 or DB703 (RAL colors possible) |
| Weight: | 43 kg |
| Feature: | Lockable by semi-cylinder. Door can be closed with inserted plugs. The sockets are integrated in the plastic housing, secured with FI/LS and completely wired. |



EST24



| | |
|---------------------|--|
| Equipment: | 1 x CEE 5/32A • 1 x CEE 5/16A • 4 x sockets |
| Fuse: | 2 x LS, B16, 1-pol • 1 x LS, C16, 3-pol • 1 x LS, C32, 3-pol • 1 x FI, 40A, 0,03A, 4-pol |
| Parts: | BAEST24 ground anchor (page 66) |
| Material: | Stainless steel |
| Dimensions: | 425 x 1000 x 285 mm (W x H x D) |
| Protection: | Housing IP10 / electr. units IP44 |
| Supply line: | 1 x below 200 x 150 mm |
| Weight: | 31 kg |
| Feature: | Lockable by semi-cylinder. Door can be closed with inserted plugs. The sockets are integrated in the plastic housing, secured with FI/LS and completely wired. |



ES401



| | |
|---------------------|--|
| Item No: | Equipment: |
| ES401-1 | 4 x CEE 3/16A |
| ES401-2 | 1 x CEE 5/32A • 1 x CEE 5/16A • 4 x sockets |
| Item No: | Fuse: |
| ES401-1 | 4 x FI/LS, 16A, 0,03A, 2-pol |
| ES401-2 | 4 x LS, B16, 1-pol • 1 x LS, C16, 3-pol • 1 x LS, C32, 3-pol • 1 x FI, 40A, 0,03A, 4-pol |
| Parts: | BAES401 ground anchor (page 65) |
| Material: | Stainless steel |
| Dimensions: | 180 x 1207 x 133 mm (W x H x D) |
| Base plate: | 230 x 235 mm (W x D) |
| Protection: | IP44 |
| Supply line: | from below |
| Weight: | 11,3 kg |



BAES321


Item No:

BAES321 Ground anchor

Parts for:

Power column ES321

Material:

Stainless steel

Dimensions:

Ø 210x564 mm

Basis:

Ø 210 mm

Surface:

Stainless steel untreated

Feature:

With mounted spirit level for easier leveling of the ground anchor during installation.



BAES323


Item No:

BAES323 Ground anchor

Parts for:

Power column ES323 and charging station ES323-EM

Material:

Stainless steel

Dimensions:

Ø 210x564 mm

Basis:

Ø 210 mm

Surface:

Stainless steel untreated

Feature:


With mounted spirit level for easier leveling of the ground anchor during installation.



BAES401



| | | |
|--------------------|---|---------------|
| Item No: | BAES401 | Ground anchor |
| Parts for: | Power column ES401 | |
| Material: | Stainless steel | |
| Dimensions: | 230 x 693 x 230 mm (W x H x D) | |
| Basis: | 230 x 230 mm (W x D) | |
| Surface: | Stainless steel untreated | |
| Feature: | With mounted spirit level for easier leveling of the ground anchor during installation. | |

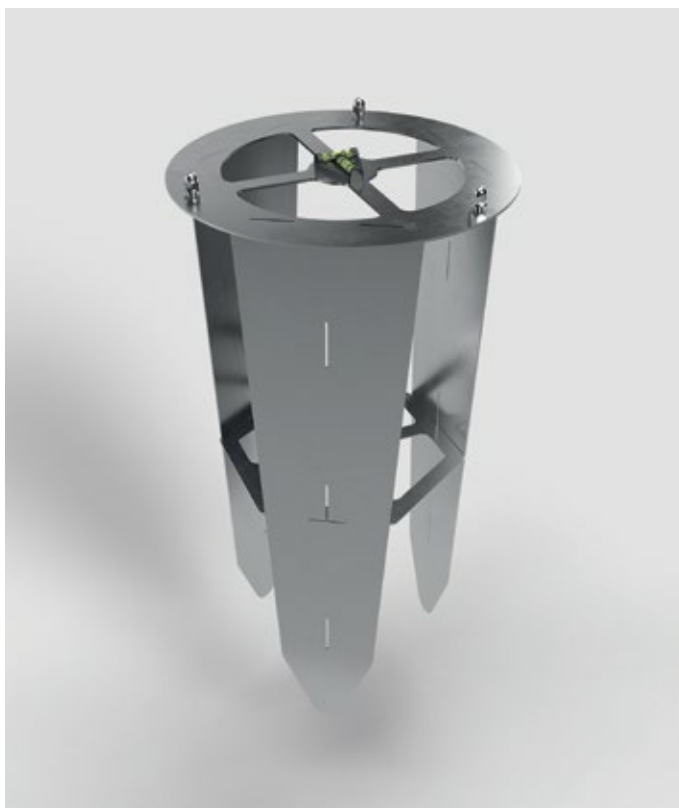

BAESP14



| | | |
|--------------------|---|---------------|
| Item No: | BAESP14 | Ground anchor |
| Parts for: | Power column ESP14 | |
| Material: | Stainless steel | |
| Dimensions: | Ø 355 x 693 mm | |
| Basis: | Ø 355 mm | |
| Surface: | Stainless steel untreated | |
| Feature: | With mounted spirit level for easier leveling of the ground anchor during installation. | |



BAESP24


Item No:

BAESP24 Ground anchor

Parts for:

Power column ESP24

Material:

Stainless steel

Dimensions:

Ø 450 x 693 mm

Basis:


Ø 450 mm

Surface:

Stainless steel untreated

Feature:

With mounted spirit level for easier leveling of the ground anchor during installation.

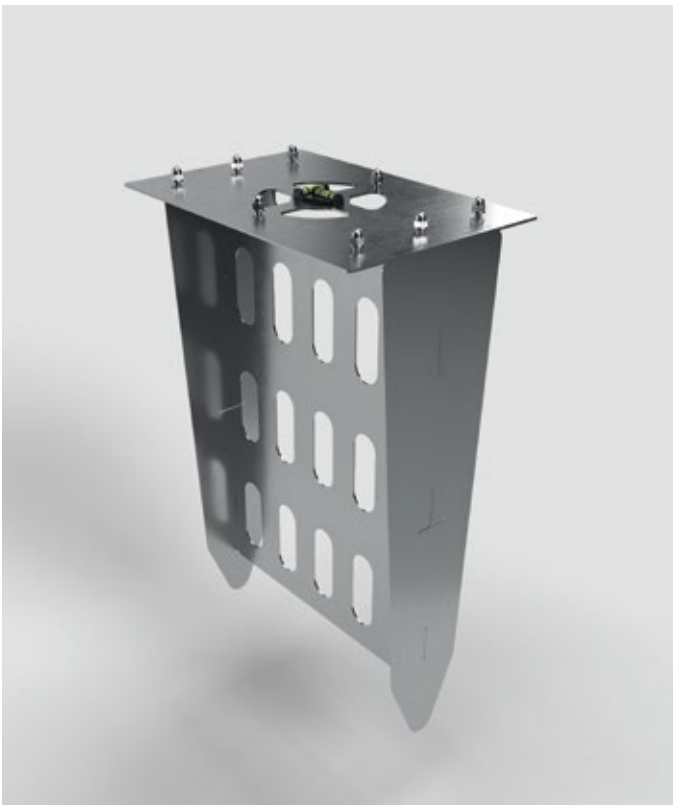

BAEST24


Item No:

BAEST24 Ground anchor

Parts for:

Power column EST24

Material:

Stainless steel

Dimensions:

404 x 693 x 280 mm (W x H x D)

Basis:


404 x 280 mm

Surface:

Stainless steel untreated

Feature:

With mounted spirit level for easier leveling of the ground anchor during installation.

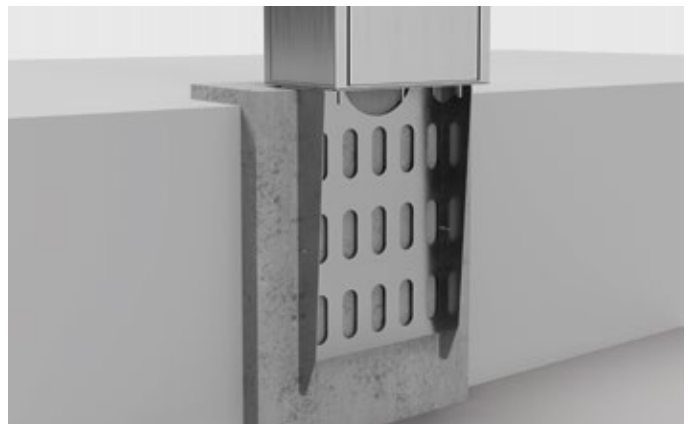



Our new socket pillar ES102.

Coming soon.




Wall distributors Wall sockets



5501A




| | |
|--------------------------|---|
| Item No: 5501A | Equipment: 1 x socket |
| Material: | Aluminum, stainless steel |
| Dimensions: | 86 x 98 x 60 mm (W x H x D) |
| Instl depth: | 51 mm (wall) |
| Protection: | IP64 (IP44 electr. units) |
| Supply line: | 2 x lateral, 2 x back, 1 x above, 1 x below, each Ø 26 mm |
| Weight: | 400 g |
| Feature: | Lockable by rotating latch lock. |

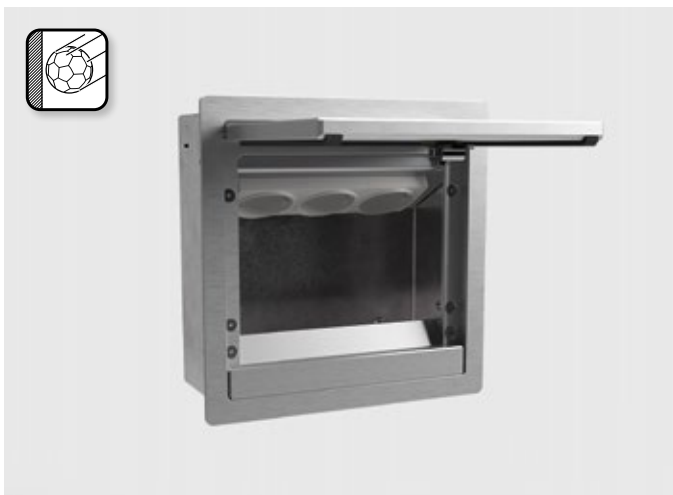

5503A



| | |
|--------------------------|---|
| Item No: 5503A | Equipment: 3 x sockets |
| 5503A1 | 2 x sockets, 1 x RJ45 double |
| Material: | Aluminum, stainless steel |
| Dimensions: | 199 x 199 x 83 mm (W x H x D) |
| Instl depth: | 81 mm (wall) |
| Protection: | IP64 (IP44 electr. units) |
| Supply line: | 2 x lateral, 2 x back, 2 x below, each Ø 26 mm |
| Weight: | 2000 g |
| Feature: | Ideal for sports halls – audited resistance to ball-impacts (DIN 18032 Part 3). Lockable with tools. Can be closed with inserted plugs. |

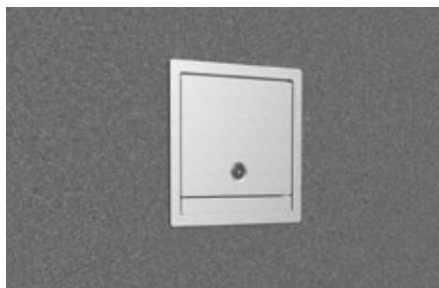



5510E



| | |
|---------------------|----------------------------------|
| Item No: | Equipment: |
| 5510E1 | 1 x CEE 5/16A 400V/6h |
| 5510E2 | 1 x CEE 5/32A 400V/6h |
| Material: | Stainless steel |
| Dimensions: | 150 x 320 x 130 mm (W x H x D) |
| Protection: | IP67 |
| Supply line: | Opening on the back 100 x 100 mm |
| Weight: | 3700 g |



5511A



| | |
|---------------------|---|
| Item No: | Equipment: |
| 5511A | 1 x CEE 5/16A 400V/6h · 1 x socket |
| Material: | Aluminum, stainless steel |
| Dimensions: | 199 x 350 x 103 mm (W x H x D) |
| Instl depth: | 101 mm (wall) |
| Protection: | IP64 (IP44 electr. units) |
| Supply line: | 2 x lateral, 2 x back, 2 x below, each Ø 26 mm |
| Weight: | 3900 g |
| Feature: | Ideal for sports halls – audited resistance to ball-impacts (DIN 18032 Part 3). Lockable with tools. Can be closed with inserted plugs. |





5523A



| | |
|---------------------|---|
| Item No: | Equipment: |
| 5523A | 3x sockets · 1 x CEE 5/16A 400V/6h · 1 x CEE 5/32A 400V/6h |
| Material: | Aluminum, stainless steel |
| Dimensions: | 400x400x145 mm (WxHxD) |
| Instl depth: | 143 mm (wall) |
| Protection: | IP44 (electr. units) |
| Supply line: | 2x lateral, 2x back, 2x above, each Ø 26 mm |
| Weight: | 9000 g |
| Feature: | Ideal for sports halls – audited resistance to ball-impacts (DIN 18032 Part 3). Lockable with tools. Can be closed with inserted plugs. |



5602E

| | |
|---------------------|---|
| Item No: | Equipment: |
| 5602E | 2x sockets |
| Material: | Stainless steel, aluminum |
| Dimensions: | 104x141x93 mm (WxHxD) |
| Protection: | IP21 (electr. units) |
| Supply line: | 1 x above, 1 x back, each Ø 25 mm |
| Color: | Black (RAL 9005), white (RAL9010), DB701, DB703 |
| Weight: | 1000 g |
| Feature: | Lockable by rotating latch lock. Can be closed with inserted plugs. |





5606E



| | |
|---------------------|--|
| Item No: | Equipment: |
| 5606E | 6 x sockets |
| 5606E1 | 3 x sockets, 3 x FI/LS |
| Material: | Stainless steel, aluminum |
| Dimensions: | 240 x 303 x 157 mm (W x H x D) |
| Protection: | IP44 (electr. units) |
| Supply line: | 2 x back, 2 x above, 2 x below, each Ø 25 mm |
| Color: | DB701 or DB703 (RAL colors possible) |
| Weight: | 5100 g |
| Feature: | The door closes even when standard plugs are inserted and can be locked with a profile half-cylinder lock. |



5620E



| | |
|---------------------|---|
| Item No: | Equipment: |
| 5620E | 1 x CEE 5/16A 400V/6h · 1 x CEE 5/32A 400V/6h |
| Material: | Stainless steel |
| Dimensions: | 300 x 400 x 217 mm (W x H x D) |
| Protection: | IP44 (electr. units) |
| Supply line: | 2 x back, 2 x below, each Ø 32 mm |
| Color: | DB701 or DB703 (RAL colors possible) |
| Weight: | 9500 g |
| Feature: | The door closes even when standard plugs are inserted and can be locked with a profile half-cylinder lock.. |





5622E



| | |
|---------------------|---|
| Equipment: | 2 x sockets • 1 x CEE 5/16A 400V/6h • 1 x CEE 5/32A 400V/6h |
| Fuse: | 2 x LS, B16, 1-pol • 1 x LS, C16, 3-pol • 1 x LS, C32, 3-pol • 1 x FI, 40A, 0,03A, 4-pol |
| Material: | Stainless steel |
| Dimensions: | 400x500x218 mm (WxHxD) |
| Protection: | IP44 (electr. units) |
| Supply line: | 2 x back, 2 x below, each Ø 32 mm |
| Color: | DB701 or DB703 (RAL colors possible) |
| Weight: | 15 kg |
| Feature: | The door closes even when standard plugs are inserted and can be locked with a profile half-cylinder lock. |

5623E



| | |
|---------------------|---|
| Equipment: | 3 x sockets • 1 x CEE 5/16A 400V/6h • 1 x CEE 5/32A 400V/6h |
| Fuse: | 3 x LS, B16, 1-pol • 1 x LS, C16, 3-pol • 1 x LS, C32, 3-pol • 1 x FI, 40A, 0,03A, 4-pol |
| Material: | Stainless steel |
| Dimensions: | 450x650x232 mm (WxHxD) |
| Protection: | IP44 (electr. units) |
| Supply line: | 2 x back, 2 x below, each Ø 32 mm |
| Color: | DB701 or DB703 (RAL colors possible) |
| Weight: | 17 kg |
| Feature: | The door closes even when standard plugs are inserted and can be locked with a profile half-cylinder lock. |



5722E



| | |
|---------------------|---|
| Equipment: | 2 x sockets • 1 x CEE 5/16A 400V/6h • 1 x CEE 5/32A 400V/6h |
| Fuse: | 2 x LS, B16, 1-pol • 1 x LS, C16, 3-pol • 1 x LS, C32, 3-pol • 1 x FI, 40A, 0,03A, 4-pol |
| Material: | Stainless steel |
| Dimensions: | 346 x 496 x 178 mm (W x H x D) |
| Instl depth: | 170 mm (wall) |
| Protection: | IP44 (electr. units) |
| Supply line: | 2 x above, 2 x back, each 1 x Ø 33 mm and 1 x Ø 41 mm |
| Color: | DB701 or DB703 (RAL colors possible) |
| Weight: | 10,5 kg |
| Feature: | The door closes even when standard plugs are inserted and can be locked with a profile half-cylinder lock. |

5723E



| | |
|---------------------|---|
| Equipment: | 3 x sockets • 1 x CEE 5/16A 400V/6h • 1 x CEE 5/32A 400V/6h |
| Fuse: | 3 x LS, B16, 1-pol • 1 x LS, C16, 3-pol • 1 x LS, C32, 3-pol • 1 x FI, 40A, 0,03A, 4-pol |
| Material: | Stainless steel |
| Dimensions: | 446 x 646 x 208 mm (W x H x D) |
| Instl depth: | 200 mm (wall) |
| Protection: | IP44 (electr. units) |
| Supply line: | 2 x above, 2 x back, each 1 x Ø 33 mm and 1 x Ø 41 mm |
| Color: | DB701 or DB703 (RAL colors possible) |
| Weight: | 17 kg |
| Feature: | The door closes even when standard plugs are inserted and can be locked with a profile half-cylinder lock. |




Electric mobility



12212



| | |
|--------------------|------------------------------------|
| Item No: | 12212 pillar |
| Equipment: | according to customer requirements |
| Material: | Stainless steel |
| Dimensions: | 400 x 1500 x 100 mm (W x H x D) |
| Base plate: | 500 x 200 mm (W x D) |
| Weight: | 37 kg |
| Color: | RAL Colors possible |

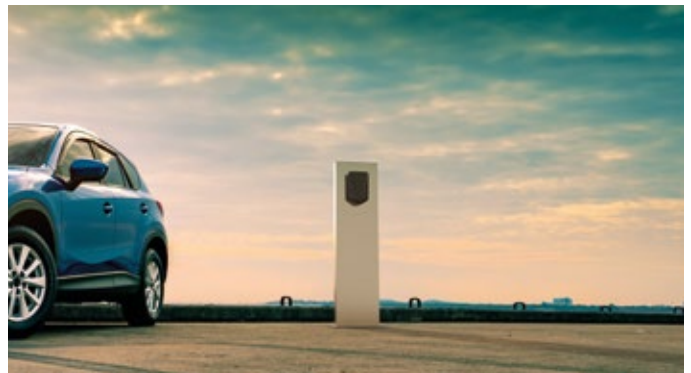

ES323-EM



| | |
|--------------------|--|
| Equipment: | 4 x sockets |
| Fuse: | 4 x FI/LS, 16A, 0,03A, 2-pol, 1TE |
| Parts: | BAES323 ground anchor/earth stake (page 64) |
| Material: | Stainless steel |
| Dimensions: | Ø 154 x 700 mm |
| Base plate: | Ø 210 mm |
| Protection: | IP44 (electr. units) |
| Weight: | 6300 g |
| Feature: | Charging points can each be equipped with an energy meter (1-phase). |







Desk power strip



3202E

| | |
|---------------------|--|
| Item No: | Equipment: |
| 3202E | 2 x sockets |
| 3202E1 | 1 x socket, 1 x RJ45 double |
| 3202E2 | 1 x socket, 1 x aerial |
| 3202E3 | 1 x socket, 1 x USB double charge |
| Material: | Stainless steel (1.4301) |
| Dimensions: | 180 x 83 x 154 mm (W x H x D) |
| Instl depth: | 81,5 mm (desk) |
| Protection: | IP20 |
| Load: | Area load max. 120kg |
| Supply line: | 2 x lateral, 2 x back, 2 x below, each Ø 26 mm |
| Feature: | Can be closed with inserted plugs. |



3203E

| | |
|---------------------|--|
| Item No: | Equipment: |
| 3203E | 3 x sockets |
| 3203E1 | 2 x sockets, 1 x RJ45 double |
| 3203E2 | 2 x sockets, 1 x aerial |
| 3203E3 | 2 x sockets, 1 x USB double charge |
| Material: | Stainless steel (1.4301) |
| Dimensions: | 230 x 83 x 153 mm (W x H x D) |
| Instl depth: | 81,5 mm (desk) |
| Protection: | IP20 |
| Load: | Area load max. 120kg |
| Supply line: | 2 x lateral, 2 x back, 2 x below, each Ø 26 mm |
| Feature: | Can be closed with inserted plugs. |





4204

| | |
|---------------------|---|
| Item No: | Equipment: |
| 4204A1 (alu) | 4 x sockets |
| 4204A2 | 3 x sockets, 1 x USB charge A/C double |
| 4204W1 (white) | 4 x sockets |
| 4204W2 | 3 x sockets, 1 x USB charge A/C double |
| 4204S1 (black) | 4 x sockets |
| 4204S2 | 3 x sockets, 1 x USB charge A/C double |
| Parts: | 12271 screw clamp set (see below) |
| Material: | Aluminum |
| Dimensions: | 186 x 70 x 76 mm (W x H x D) |
| Protection: | IP20 |
| Color: | Natural anodized aluminium, white (RAL9010), black (9005) |
| Supply line: | Rear connection (cable length 3 m) |



12271


| | |
|-----------------------|-------------------------------|
| Item No: | Screw clamp set |
| 12271 | |
| Parts for: | 4204 desk power strip |
| Material: | Aluminum, plastic |
| Dimensions: | 185 x 116 x 49 mm (W x H x D) |
| Locking range: | up to 30 mm |
| Surface: | Stainless steel untreated |



Desk power strip 4204A2



Hanging distributors

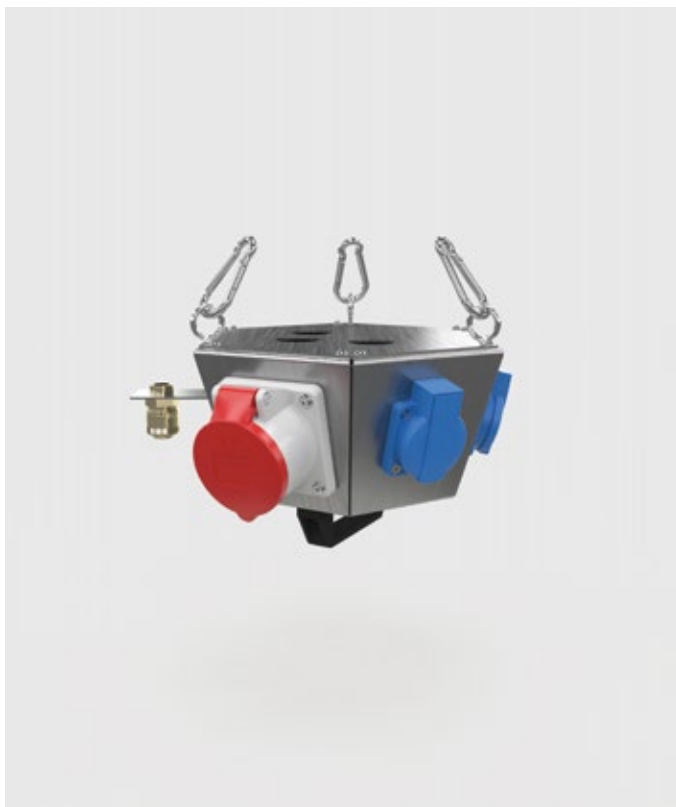

HV1006

Equipment: 3 x sockets • 1 x CEE 5/16A 400V/6h • 1 x RJ45 double • 1 x compressed air coupling

Material: Stainless steel (1.4301)

Dimensions: 260x172x236 mm (WxHxD)

Protection: IP20

Weight: 1900 g

Supply line: 3 x above, each Ø 32 mm

Feature: The hanging distributor HV1006 is delivered with hooks and carabiners (without cables, hoses and wire ropes shown).





GTC

General Terms and Conditions of sale and delivery of BS Bodensteckdosen Systemtechnik GmbH

I. PRELIMINARY REMARK

1. Area of application

The deliveries, services and offers of BS Bodensteckdosen Systemtechnik GmbH (hereinafter „BS“, „we“, „us“) are made exclusively on the basis of these General Terms and Conditions of Sale and Delivery (hereinafter „GTC“).

These are part of all contracts that we conclude with our customers (hereinafter „customer“, „you“) about the goods we offer.

2. Customer group

2.1 Our product range is aimed at both consumers and entrepreneurs.

2.2 For the purposes of these Terms and Conditions, (i) a “consumer” is any natural person who concludes a legal transaction for purposes which are predominantly neither commercial nor self-employed (§ 13 BGB) and (ii) an “entrepreneur” is a natural or legal person or a legal partnership that, in concluding a legal transaction, acts in the exercise of its commercial or independent professional activity (§ 14 BGB).

3. Structure

3.1 In the following section “II General Conditions”, are those conditions listed which apply in particular to consumers.

For entrepreneurs, they also apply, unless it is explicitly stated that the scope is limited to consumers.

3.2 In the section “III. Special Conditions” are other conditions listed that apply to business owners only.

II. GENERAL CONDITIONS

1. Contract language

The language available for the contract is German.

2. Contract partner

The contract is concluded with BS Bodensteckdosen Systemtechnik.

3. Offer and conclusion of contract

3.1 The offers and prices contained on our website under the domain floor socketn.com, in brochures, advertisements and other advertising material are non-binding.

3.2 If the customer places an order with us, this constitutes a binding offer to conclude a contract within the meaning of § 145 BGB.

The customer is bound by his declaration 10 calendar days after delivery or by order in text form (e.g. by post/fax/e-mail) from the date of dispatch.

We are entitled to accept the offer within this period.

Decisive for the observance of the period is the time, in which our assumption goes to the customer. Acceptance is also the delivery of the ordered goods.

3.3 As an alternative to the direct order from the customer, we will gladly provide you with a binding offer in writing (i.S.d. § 145 BGB).

We are bound to this 14 calendar days from dispatch.

The customer is entitled to accept our offer within this period. Decisive for compliance with the deadline is the time of receipt of the acceptance by us. Acceptance is also the payment.

4. Right of withdrawal for Consumers

4.1 Every customer who is a consumer is entitled to the statutory right of withdrawal.

Details can be extracted of the cancellation policy, which is printed in our catalog according to these terms and conditions and also on our website under floor socketn.com and there can be found under the link „Withdrawal“.

4.2 The above said under no. 4.1 does not apply to consumers who conclude a contract with us in our business premises (Dingerdisser Str. 36, 33699 Bielefeld) or make a corresponding offer to us. There is no right of withdrawal for these.

The right of withdrawal also does not apply to the following contracts:

- Contracts for the supply of goods that are not prefabricated and of which for the manufacture an individual selection or provision by the consumer is authoritative or which are clearly tailored to the personal needs of the consumer,

- Contracts for the supply of goods, if, due to their character, they were inseparably mixed with other goods after delivery.

5. Return costs upon revocation

In the case that the customer is a consumer and revokes the contract in the context of his legal right of withdrawal, it is agreed that he has to bear the direct costs of returning the goods.

6. Provider identification, summonable address

Our contact details for complaints and other declarations of intent as well as our address are:

BS Bodensteckdosen Systemtechnik GmbH
Dingerdisser Str. 36
33699 Bielefeld
Germany
represented by business executive Viktor Sperle

Telephone: +49 521 9892780
Telefax: +49 521 989278-30

E-mail: info@bodensteckdosen.com

Register court: Amtsgericht Bielefeld
Register number: HRB40648

Sales tax identification number: DE282391374

7. Prices, shipping costs

7.1 Our prices include the statutory sales tax.

7.2 Shipping is at the expense of the customer.

Regardless of the order value, we charge a flat rate of € 9.00 per order for standard shipping within Germany. For express shipping within Germany, we charge a flat rate of € 40.00 per order, regardless of the order value.

For standard delivery within the EU (except Germany), we charge a flat rate of € 40.00 per order, regardless of the order value. Express shipping to other EU countries is not possible.

8. Payment

Payment is by bank transfer, PayPal or when you buy in our offices in cash.

Payment in advance by bank transfer

When selecting the payment method „bank Transfer“ we will give you our bank details in our offer / order confirmation. There are no additional costs for the customer except for any transaction fees incurred by the customer's bank.

Payment in advance by PayPal

If you select the payment method „PayPal“, we will give you an e-mail address in our offer / order confirmation, which you can use to pay via the aforementioned online provider. In order to be able to use this payment method, the customer must already be registered with PayPal or register first, legitimize himself with his access data and confirm the payment order to us (except, if applicable, guest access).

Technical personnel, drivers and sales force service staff are not eligible for collection.

9. Shipment, Collection

Delivery is only within the EU.

Unless otherwise expressly agreed, we will determine the appropriate shipping method and carrier at our discretion.

In reasonable extent for the customer, we are entitled to partial deliveries. Additional shipping costs are not incurred by the customer through partial deliveries.

In the event of non-availability of the ordered goods due to late or incorrect delivery (including the delivery of small quantities) by our (pre-) supplier in spite of a delivery contract concluded by us with the (pre-) supplier of the ordered goods we reserve the right to not deliver. In this case, we undertake to inform the customer immediately about the unavailability of the ordered goods and to immediately refund any payments already received from the customer.

Delivery takes place within the delivery period specified for the respective product.

The delivery period starts on the day of receipt of the full purchase price (including sales tax and shipping costs).

Delivery is only at ground level and only up to the first door to the address specified by the customer.

If we fail to meet an agreed delivery date, the buyer must set us a reasonable period of grace, which must not be less than one week.

You have the option of picking up at BS Bodensteckdosen Systemtechnik GmbH, Dingerdisser Str. 36, 33699 Bielefeld, Germany for the following business hours:

Mo–Th: 08:00 am – 04:00 pm
Fr: 08:00 am – 02:00 pm

10. Rights in case of material defects

If the customer is a consumer, all goods sold by us are entitled to statutory warranty claims in the event of material defects.

11. Retention of title

The delivered goods remain our property until their complete payment.

12. Privacy

We collect and store the data of the customer necessary for the transaction. When processing the personal data of the customer, we observe the legal provisions. Further details can be found in our „Privacy Policy“, which you will find under the link of the same name on our homepage at floor.socketn.com

13. Sending the contract terms

We provide the customer, who is consumer, at the latest with delivery of the goods, the contract terms including these terms and conditions in writing.

14. Further regulations, dispute resolution

- 14.1 Should one or more provisions of these General Terms and Conditions be invalid, the remainder of the contract remains valid. The ineffective regulation is replaced by the legal regulation.
- 14.2 German law applies excluding the UN sales law (CISG). This choice of law applies only to the extent that this does not withdraw mandatory applicable Consumer protection laws of the state in which the consumer is habitually resident at the time of the order.
- 14.3 The European Commission provides a platform for online dispute resolution (OS), which can be found at the following link: <http://ec.europa.eu/consumers/odr/>. We are not obligated and unwilling to participate in a dispute settlement procedure before a consumer arbitration board.

III. SPECIAL CONDITIONS

1. Future business, Customer-GTC

- 1.1 For customers who are entrepreneurs, these GTC also apply to future business, even if we do not point this out again in the future.
- 1.2 Terms and conditions of the customer do not apply, even if we do not separately contradict their validity in individual cases. Even if we refer to a letter that contains or refers to terms and conditions of the customer or a third party, this does not constitute acceptance of the validity of these terms and conditions.

2. Offer and Conclusion of contract

The statements made in II. 3. regarding the offer and conclusion of the contract also apply to business customers, but with the following provisos:

- 2.1 The sole decisive factor for the legal relationship between us and the customer is the written purchase contract, including these GTC. This completely reproduces all agreements between the contracting parties regarding the subeactht matter of the contract. Verbal commitments by BS before conclusion of the contract are legally non-binding and verbal agreements of the contracting parties are replaced by the written contract, unless it is expressly clear from them that they continue to be binding.
- 2.2 Information provided by BS on the subeactht matter of the delivery / service (eg weights, dimensions, utility values, load capacity, tolerances and technical data) as well as our representations of the same (eg drawings and illustrations) are only approximate unless the usability for the contractually provided purpose presupposes an exact match. They are not guaranteed characteristics, but descriptions or labeling of the delivery / service. Customary deviations and deviations, which occur due to legal regulations or represent technical improvements, as well as the replacement of components by equivalent parts are permissible, as far as they do not affect the usability for the contractually intended purpose.
- 2.3 BS reserves the ownership / copyright of all offers and estimates submitted by it, as well as any drawings, illustrations, calculations, brochures, catalogs, models, tools and other documents and aids provided to the customer. The customer may not make these oeachchts accessible to third parties without the express consent of BS, as such, or in terms of content, notify them, or use or duplicate them themselves or through third parties. He shall, at the request of BS, return these items in full and destroy any copies made if they are no longer required by him in the ordinary course of business or if negotiations do not lead to the conclusion of a contract. Excluded from this is the storage of electronically provided data for the purpose of conventional data backup.

3. Prices, Price changes

The comments made under II. 7 on prices also apply to business customers, but with the following stipulations / changes:

- 3.1 By way of derogation from II.7.1, in the case of tenders and written offers, net prices are given which are understood to be exclusive of statutory value added tax.
- 3.2 Insofar as the agreed prices are based on the list prices of BS and delivery should take place more than four months after the conclusion of the contract, the list prices of BS valid on delivery shall apply.

4. Payment and delay

The comments made under II. 8 on payment options also apply to business customers, but with the following stipulations / changes / additions:

In addition to those in II.8. business customers can also pay by invoice. The invoice amounts are payable within twenty-one days without any deductions, unless otherwise expressly agreed. Decisive for the date of payment is receipt by us. Payment by check is excluded unless it is agreed separately in individual cases.

If the customer does not pay by the due date, the outstanding amounts shall be subeactht to interest at a rate of 9 percentage points above the base rate from the due date; the assertion of higher interest and further damages in case of default remains unaffected.

5. Set-off and right of retention

- 5.1 The offsetting of counterclaims of the customer or the retention of payments due to such claims is only permitted if the counterclaims are undisputed or legally binding.
- 5.2 BS shall be entitled to execute or render outstanding deliveries or services only against advance payment or provision of security if, after the conclusion of the contract, it becomes aware of circumstances which are capable of substantially reducing the creditworthiness of the customer and by which the payment of BS's outstanding claims of the customer from the respective contractual relationship (including from other individual orders to which the same framework contract applies) is endangered.

6. Shipping, Collection, Place of fulfilment, passing of risk, Approval

By way of derogation from, or supplementary to II. 9., the following applies to business customers with regard to shipping and collection as well as (additionally) with regard to the place of fulfilment, transfer of risk and approval:

- 6.1 Place of fulfilment for all obligations arising from the contractual relationship are our business premises, unless otherwise specified. We reserve the right to deliver goods from other locations (third-party shops). In these cases, the respective location from which the delivery takes place is the place of fulfilment.
- 6.2 The risk shall pass to the customer at the latest upon the handover of the delivery item (whereby the beginning of the loading process is decisive) to the forwarder, carrier or other third party designated for the execution of the shipment. This also applies if partial deliveries are made or BS has taken on other services (such as shipping). If the shipment or transfer is delayed as a result of a made of whose made of lies with the customer, the risk passes to the customer from the day on which the delivery item is ready for despatch and BS has notified the customer.
- 6.3 Storage costs after transfer of risk shall be borne by the customer. In the case of storage by BS, the storage costs amount to 0.25 percent of the invoice amount of the delivery items to be stored per completed week. The assertion and proof of further or lower storage costs remains reserved.
- 6.4 Deadlines and dates for deliveries and services provided by BS are only approximate, unless a fixed deadline or a fixed date has been expressly confirmed or agreed. If shipment has been agreed, delivery periods and delivery dates refer to the time of transfer to the forwarder, carrier or other third party commissioned with the transport.
- 6.5 Without prejudice to its rights arising from default by the customer, BS may require the customer to extend delivery and service periods or postpone delivery and service deadlines by the period in which the customer fails to meet its contractual obligations towards BS.
- 6.6 BS shall not be liable for impossibility of delivery or for delays in delivery, as far as these are due to force majeure or other unforeseeable events at the time of the conclusion of the contract (eg breakdowns of all kinds, difficulties in material or energy procurement, delays in transport, strikes, legitimate lockouts, lack of manpower, Energy or raw materials, difficulties in obtaining necessary regulatory approvals, regulatory action or the lack of, incorrect or untimely supplier delivery) that BS is not responsible for. If such events make the delivery or service substantially more difficult or impossible and the hindrance is not only temporary, BS is entitled to withdraw from the contract. In the case of obstacles of a temporary duration, the delivery or service periods shall be extended or the delivery or service dates shall be postponed by the period of the hindrance plus a reasonable start-up period. Insofar as the customer can not reasonably be expected to accept the delivery or service as a result of the delay, he can withdraw from the contract by means of an immediate, written declaration to BS.
- 6.7 In reasonable extent for the customer, we are entitled to partial deliveries. Additional shipping costs are not incurred by the customer through partial deliveries.
- 6.8 If BS is in default with a delivery or service or if it becomes impossible for it to deliver or perform any service for whatever reason, BS's liability for damages is limited in accordance with III. 7.
- 6.9 We will insure the shipment against theft, breakage, transport, fire and water damage or other insurable risks only at the express request of the customer and at his expense.

- 6.10 Insofar as acceptance has to take place, the purchased item shall be deemed accepted if

- the delivery and, if BS also owes the setting up / installation, the setting up / installation is completed,
 - BS informed the customer with reference to the acceptance fiction according to this III. 6.10 and has asked him to accept,
 - 12 working days have passed since the delivery or setting up / installation or the customer has started to use the purchased goods and in this case six working days have elapsed since delivery or installation
- and
- the customer refrained from accepting the goods within this period for any reason other than a defect indicated to us which makes the use of the goods impossible or substantially impaired.

7. Liability

Differing from II. 10., the following applies to liability for business customers under the express application for merchants of § 377 HGB:

- 7.1 We are also liable for damages to customers who are entrepreneurs, according to the legal provisions without limitation, if these
- a. are based on injury to life, body or health and have been caused by a willful or negligent breach of duty by us, our legal representatives or vicarious agents,
 - or
 - b. based on an intentional or grossly negligent breach of duty by us, our legal representatives or vicarious agents
 - or
 - c. based on the product liability law
 - or
 - d. We have assumed a procurement risk or a guarantee and are therefore liable.
- 7.2 Is a loss based only on negligent but not grossly negligent breach of a contractual obligation (cardinal obligation) by us, our legal representatives or vicarious agents, without at the same time a claim based on the above provisions to a. to d. we are also liable for damages, but limited in amount to Typical and foreseeable damage.
- Essential contractual obligations (cardinal obligations) in the above sense are those obligations whose proper fulfilment the customer trusts and may trust, because they shape the contract.
- 7.3 In addition, we are liable, as far as claims for damages are covered by a liability insurance.
- 7.4 It remains with the legal burden of proof distribution.
- 7.5 Further claims for damages against us, our legal representatives or vicarious agents are excluded, no matter on what legal grounds they are based.

8. Statute of limitation of material defects

- 8.1 Rights and claims of customers who are entrepreneurs become statute-barred in one year, unless
- a. the delivered goods are a thing that has been used for a building in accordance with its normal use and has caused its defectiveness
 - or
 - b. these are reimbursement claims according to § 479 BGB
 - or
 - c. the defect is based on an intentional breach of duty by us, our legal representatives or vicarious agents
 - or
 - d. these are claims for damages.
- In cases a. to d. the statutory limitation periods apply.
- 8.2 It remains with the legal provisions on the inhibition, expiry and on the new beginning of the statute of limitations.

9. Retention of title

Differing the provision in II. 11., to customers who are entrepreneurs the following retention of title applies:

- 9.1 We reserve ownership of all delivered goods (goods subeachct to retention of title) until full payment of the purchase price and until such time as all our claims from the business relationship have been paid.
- 9.2 The customer is entitled to process the goods in the ordinary course of business and to resell them, as long as he is not in default with the fulfillment of his obligation towards us or stops his payments. Specifically, the following applies:

- a. The processing or transformation of the reserved goods takes place for us within the meaning of § 950 BGB, without obliging us. By processing or transformation of the reserved goods, the customer does not acquire the property in accordance with § 950 BGB on the new thing.

If the reserved goods are processed, mixed, blended or combined with other obeachcts, we acquire co-ownership of the new item at a share that corresponds to the ratio of the invoice value of our reserved goods to the total value.

The provisions applicable to the goods subeachct to retention of title shall apply mutatis mutandis to the co-ownership shares arising under the above provisions.

- b. The customer herewith assigns the receivables from the resale or the other sales transactions, such as Contracts with all ancillary rights to us from and proportionately also in so far as the goods are processed, mixed or blended and we have acquired hereby in the amount of our invoice value co-ownership or the product is permanently installed. Insofar as the reserved goods are processed, mixed, blended or permanently installed, we are entitled to a fraction of the respective claim from the resale in proportion to the invoice value of our reserved goods to the invoice value of the obeachct.

If the reserved goods are sold by the customer together with other goods not supplied by us, the customer hereby assigns to us a portion of the claim from the resale in the amount of the invoice value of our reserved goods.

If the customer has sold this claim in the context of genuine factoring, he hereby assigns to us the claim against the factor which will take its place. If the claim from the resale by the customer into a current account relationship with his customer, he assigns his claim from the current account relationship hereby amounting to the invoice value of the goods subeachct to retention.

- c. We hereby accept the above assignments.
- d. The customer is entitled until the revocation by us to collect the claims assigned to him. The collection authorization expires on revocation, which takes place if the customer is in default of payment or stops the payment. In this case we are authorized by the customer to inform the customers of the assignment and to collect the claim ourselves.

The customer is obliged to give us on request a detailed list of his claims with the name and address of the customer, amount of each claim, date of invoice, etc. and give us all information and documents necessary for the assertion of the assigned claims and the review to allow this information.

- e. Amounts received from assigned claims by the customer are to be set aside for us until the transfer to us.
- f. Pledges or assignments of security of the reserved goods or the assigned claims are inadmissible. We are to be informed immediately of seizures, stating the seizure creditor.
- 9.3 If the value of the securities to which we are entitled exceeds our total claim against the customer by more than 10%, we shall be obliged to release it at the customer's request.
- 9.4 The customer stores the reserved goods for us free of charge. The customer must insure them against usual dangers such as fire, theft and water to the usual extent. The customer hereby assigns to us his claims for compensation which he is entitled to from damages of the Typee mentioned against insurance companies or other persons liable for compensation in the amount of his claim. We accept the assignment.

10. Return of goods

- 10.1 Our consent must be obtained before returning any goods.
- 10.2 As a matter of principle, we do not assume any return costs. Goods returned freight collect will not be accepted.
- 10.2 If the goods are returned within 3 months from the date of delivery, we charge 15% return costs, within 4-12 months we charge 30% return costs. After 12 months a return is excluded. Furthermore, BS reserves the right to exclude items removed from the product range from return after 6 months.
- 10.3 Order cancellations are not permitted. We reserve the right to refuse cancellation requests or to charge a flat cancellation fee of 50€. If the goods are already ready for dispatch, we reserve the right to charge a cancellation fee of 15% of the value of the goods.
- 10.4 Returned goods must be in their original packaging and in a proper and saleable condition. Dirty, damaged, or incomplete goods will not be taken back. Custom-made products and special designs are excluded from exchange or return. Returns with a net goods value of less than EUR 50 will not be refunded.

11. Place of jurisdiction

- 11.1 The place of jurisdiction is located at our registered office, provided that the entrepreneur's business is a merchant or the other requirements of a jurisdiction agreement according to § 38 ZPO are met.
- 11.2 We are always entitled to use the business customer at his general place of jurisdiction.

12. Proper law

With respect to customers who are entrepreneurs, German law always applies to the contractual relationship, as it does under two contractual partners domiciled in Germany, to the exclusion of the UN Sales Convention (CISG).

Right of Cancellation for Consumers

CANCELLATION POLICY

Right of Cancellation

You have the right to withdraw from this contract within fourteen days without giving any reason.

The revocation period is fourteen days from the day on which you or a third party named by you, who is not the carrier, had or has taken possession of the last goods.

In order to exercise your right of revocation, you must inform us (BS Bodensteckdosen Systemtechnik GmbH, Dingerdisser Str. 36, 33699 Bielefeld, phone: 0521 9892780, fax: 0521 989278-30, E-Mail: info@bodensteckdosen.com) by means of a clear statement (eg one with the post sent letter, fax or e-mail) about your decision to withdraw from this contract.

In order to maintain the cancellation period, it is sufficient for you to send the notification of the exercise of the right of withdrawal before the expiry of the withdrawal period.

Consequences of the cancellation

If you withdraw from this Agreement, we have to repay all payments we have received from you, including delivery charges (except for the additional costs arising from choosing a different delivery method than the most favorable standard delivery we offer) immediately and at the latest within fourteen days from the date on which the notification of your revocation of this contract has reached us. For this repayment, we will use the same means of payment as you used in the original transaction, unless expressly agreed otherwise with you; In no case you will be charged for this repayment fees. We may refuse repayment until we have received the goods back or until you have provided proof that you have returned the goods, whichever is the earlier.

You must return the goods to us immediately and in any event not later than fourteen days from the date on which you inform us of the cancellation of this contract. The deadline is met if you send the goods before the deadline of fourteen days. You bear the immediate costs of returning the goods. You only have to pay for a possible loss in value of the goods, if this loss of value is due to a handling that is not necessary for the examination of the nature, characteristics and functioning of the goods.

End of revocation


The right of withdrawal does not apply to the following contracts:

- Contracts for the supply of goods which are not prefabricated and for the manufacture of which an individual selection or determination by the consumer is decisive or which are clearly tailored to the personal needs of the consumer,
- Contracts for the supply of goods, if, due to their nature, they were inseparably mixed with other goods after delivery.

INDEX

| | | | | | |
|--------------|----|-------------|----|----------------|----|
| 1206 | 6 | 7501A..... | 32 | 9902A | 29 |
| 12201 | 26 | 7601A..... | 33 | 9902B..... | 29 |
| 12202 | 27 | 7602A..... | 33 | 9902D..... | 30 |
| 12203 | 28 | 7604A..... | 34 | 9904A | 30 |
| 12210 | 36 | 7701AW..... | 34 | 9908A..... | 46 |
| 12212..... | 78 | 7702A..... | 35 | BAES321 | 64 |
| 12251 | 36 | 7704A | 35 | BAES323 | 64 |
| 12255 | 37 | 7705A..... | 52 | BAES401 | 65 |
| 12256 | 37 | 8302A | 14 | BAESP14 | 65 |
| 12271 | 83 | 8308A | 14 | BAESP24 | 66 |
| 2003A | 6 | 8310A..... | 52 | BAEST24 | 66 |
| 2003B | 7 | 8314A..... | 53 | ES301 | 60 |
| 2003Q | 7 | 8501B..... | 40 | ES321..... | 60 |
| 2004A | 8 | 8501E..... | 40 | ES323 | 61 |
| 2004B | 8 | 8502B..... | 41 | ES323-EM | 78 |
| 2004Q | 9 | 8502E..... | 41 | ES401 | 63 |
| 2008A | 9 | 8504B | 42 | ES850 | 61 |
| 2008B | 10 | 8504E..... | 42 | ESP14 | 62 |
| 2008Q | 10 | 8508B | 43 | ESP24..... | 62 |
| 2403E..... | 11 | 8508E..... | 43 | EST24 | 63 |
| 3202E..... | 11 | 8512B..... | 44 | HV1006..... | 86 |
| 3203E..... | 12 | 8601A..... | 15 | SV111 | 56 |
| 3301E..... | 12 | 8602A..... | 15 | SV112..... | 56 |
| 3302E..... | 13 | 8604A | 16 | SV301 | 57 |
| 3303E..... | 13 | 8701A..... | 16 | SV302..... | 57 |
| 3202E..... | 82 | 8702A..... | 17 | SV501 | 58 |
| 3203E..... | 82 | 8802A | 17 | | |
| 4204 | 83 | 8802B | 18 | | |
| 5501A..... | 70 | 8802E..... | 18 | | |
| 5503A..... | 70 | 8802T..... | 19 | | |
| 5510E | 71 | 8804B | 19 | | |
| 5511A | 71 | 8804E..... | 20 | | |
| 5523A..... | 72 | 8804T..... | 20 | | |
| 5602E..... | 72 | 8808A | 21 | | |
| 5606E..... | 73 | 8808B | 21 | | |
| 5620E..... | 73 | 8808E..... | 22 | | |
| 5622E..... | 74 | 8808T..... | 22 | | |
| 5623E..... | 74 | 8810B..... | 23 | | |
| 5722E..... | 75 | 8900B | 23 | | |
| 5723E..... | 75 | 8901B..... | 24 | | |
| 6400E..... | 48 | 8902B..... | 24 | | |
| 6522A | 48 | 8902H | 44 | | |
| 6523Q | 49 | 8904B | 25 | | |
| 6610A | 49 | 8904H | 45 | | |
| 6620A..... | 50 | 8908B | 25 | | |
| 7003A..... | 32 | 8908H | 45 | | |
| 7012A..... | 50 | 8912B..... | 26 | | |
| 7012A63..... | 51 | 8920B | 27 | | |
| 7022A | 51 | 9901A..... | 28 | | |



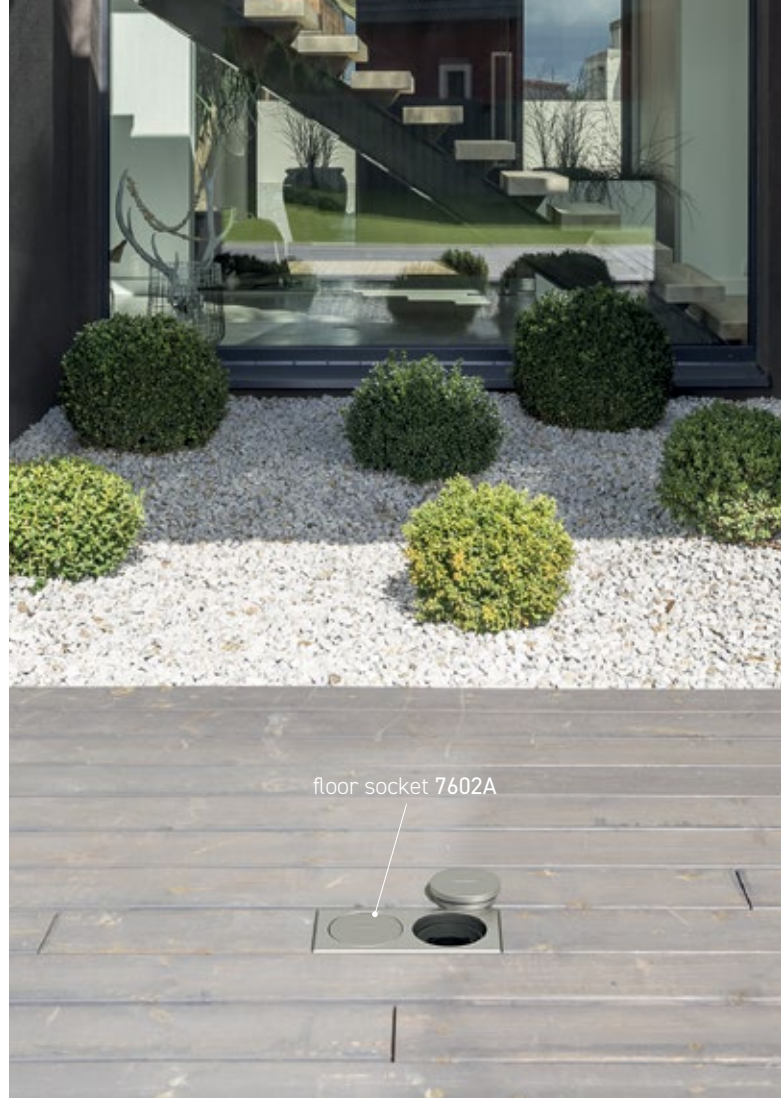



Floor tank 6620A | Practical outdoors.

Quality, purism and functionality.



TO THE HOMEPAGE



**BS BODENSTECKDOSEN
SYSTEMTECHNIK**

© by BS Bodensteckdosen Systemtechnik

BS Bodensteckdosen Systemtechnik GmbH
Dingerdisser Str. 36, 33699 Bielefeld, Germany

Fon +49 521 9892780

Fax +49 521 989278-30

info@bodensteckdosen.com

www.bodensteckdosen.com

Subject to errors and technical changes.