

Energy columns: ESP24-2*-L


Specification:

Item No:	ESP24-2*-L
Product line:	Energy columns
Units:	10
Mounting (qty):	8 x Schuko 1 x CEE 5/16A 400V/6h 1 x CEE 5/32A 400V/6h
Protection:	1 x MCB, C16, 3-p 1 x MCB, C32, 3-p 2 x MCB, B16, 1-p 1 x RCCB, 40A, 0.03A, 4-p
Connection:	1 x Terminal box 4 x 5 x 16 mm ²
Wiring:	Pre-wired ready to connect
Construction:	Pillar
Ground:	Suitable for stone, concrete and asphalt
Type of inst.:	Surface mounted
Door character.:	• Closable with plugged in plugs • Lockable by Semi-cylinder closed
Environment:	Outdoor area
EAN:	0706332886267



Technical data:

Protection class:	IP 44 (in unused condition) IP 44 (in used condition)
Material:	Column made of 3mm stainless steel (1.4301)
Colour:	DB701(*-6) / DB703(*-7) or by arrangement
Surface:	Powder-coated
Weight:	43,50 kg
Dimensions:	Ø: 450 mm height: 1145 mm
Supply line:	On the bottom
Connected load:	12,5 Watt
Color temperature	3000 K
Luminous flux:	1125 lm
Lifetime:	50000 h

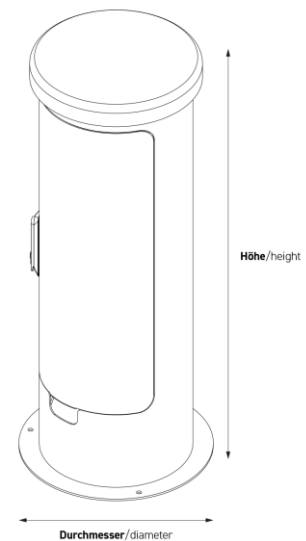

Features:

Opt. Accessory:	Item No. BAESP24 - Ground anchor for ESP24
Features:	Complete and pre-assembled