


## Energy columns: ESP24-4\*-L

### Specification:

<b>Item No:</b>	ESP24-4*-L
<b>Product line:</b>	Energy columns
<b>Units:</b>	7
<b>Mounting (qty):</b>	4 x Schuko 1 x CEE 5/16A 400V/6h 1 x CEE 5/32A 400V/6h 1 x CEE 5/63A 400V/6h
<b>Protection:</b>	1 x MCB, C63, 3-p 1 x MCB, C16, 3-p, 2DU 1 x MCB, C32, 3-p, 2DU 1 x MCB, B16, 1-p 1 x RCCB, 63A, 0.03A, 4-p
<b>Connection:</b>	1 x Terminal box 4 x 5 x 16 mm <sup>2</sup>
<b>Wiring:</b>	Pre-wired ready to connect
<b>Construction:</b>	Pillar
<b>Ground:</b>	Suitable for stone, concrete and asphalt
<b>Type of inst.:</b>	Surface mounted
<b>Door character.:</b>	• Closable with plugged in plugs • Lockable by Semi-cylinder closed
<b>Environment:</b>	Outdoor area
<b>EAN:</b>	0706332886281

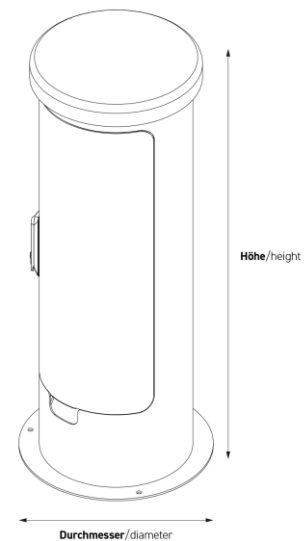

### Technical data:

<b>Protection class:</b>	IP 44 (in unused condition) IP 44 (in used condition)
<b>Material:</b>	Column made of 3mm stainless steel (1.4301)
<b>Colour:</b>	DB701(*-6) / DB703(*-7) or by arrangement
<b>Surface:</b>	Powder-coated
<b>Weight:</b>	43,50 kg
<b>Dimensions:</b>	Ø: 450 mm height: 1145 mm
<b>Supply line:</b>	On the bottom
<b>Connected load:</b>	12,5 Watt
<b>Color temperature</b>	3000 K
<b>Luminous flux:</b>	1125 lm
<b>Lifetime:</b>	50000 h

### Features:

<b>Opt. Accessory:</b>	Item No. BAESP24 - Ground anchor for ESP24
<b>Features:</b>	Complete and pre-assembled

